

PUBLISHED BY

INTECH

open science | open minds

World's largest Science,
Technology & Medicine
Open Access book publisher



3,000+
OPEN ACCESS BOOKS



101,000+
INTERNATIONAL
AUTHORS AND EDITORS



99+ MILLION
DOWNLOADS



BOOKS
DELIVERED TO
151 COUNTRIES

AUTHORS AMONG

TOP 1%
MOST CITED SCIENTIST



12.2%
AUTHORS AND EDITORS
FROM TOP 500 UNIVERSITIES



Selection of our books indexed in the
Book Citation Index in Web of Science™
Core Collection (BKCI)

Chapter from the book *Hybrid Electric Vehicles*

Downloaded from: <http://www.intechopen.com/books/hybrid-electric-vehicles>

Interested in publishing with InTechOpen?
Contact us at book.department@intechopen.com

Development of Bus Drive Technology towards Zero Emissions: A Review

Julius Partridge, Wei Wu and Richard Bucknall

Additional information is available at the end of the chapter

<http://dx.doi.org/10.5772/68139>

Abstract

This chapter aims to provide a comprehensive review of the latest low emission propulsion vehicles, particularly for bus applications. The challenges for city bus applications and the necessity for low emission technologies for public transportation are addressed. The review will be focusing on the London bus environment, which represents one of the busiest bus networks in the world. The low emission bus applications will be analysed from three main areas: hybrid electric buses, battery electric buses and fuel cell buses. This summarises the main technologies utilised for low emissions urban transportation applications. A comprehensive review of these low emission technologies provides the reader with a general background of the developments in the bus industry and the technologies utilised to improve the performance in terms of both efficiency and emission reduction. This will conclude with a summary of the advantages and disadvantages of the three main technologies and explore the potential opportunity of each.

Keywords: low emission drive, battery bus, hybrid electric bus, fuel cell bus, vehicle performances

1. Introduction

Over the past 100 years, the bus industry has come to be dominated by diesel powered buses due to their increasingly low cost and greater maturity of the technology. However, this comes at an environmental cost, for example, over 600 kt of CO₂ was emitted by London's bus fleet in 2015 [1]. It is these carbon emissions and their link to climate change that have provided one of the major drivers in recent years to develop and deploy alternative technologies for bus propulsion [2]. Other emissions associated with diesel vehicles such as NO_x and particulates

have provided a local driver to change due to their detrimental impacts on human health [3–5]. In 2008, it was estimated over 4000 deaths were brought forward as a result of long-term exposure to particulates in London [6]. In order to combat these concerns, many cities have introduced measures such as the ‘low emission zone’ in London and emission control targets [7]. London is to introduce the first ultra-low emissions zone (ULEZ) in 2020, which, amongst other targets will aim to replace conventional diesel powered buses with low emissions alternatives [8, 9]. Despite this drive for change, it is evident that finding a replacement for diesel buses is not simple. In addition to the low cost, simplicity, reliability and maturity of the technology, diesels also offer excellent characteristics to meet the required power demands and operational needs of city buses. It can be seen from **Figure 1**, the diesel engine that is a type of internal combustion engine (ICE) provides high output powers and uses energy dense fuel making them ideal for both the range and operating times expected of city buses and also for meeting the high transient power requirements during acceleration.

In order to address the environmental concerns posed by diesel buses, a number of technologies are being investigated and implemented. The most widespread of these are diesel-hybrid buses, which make use of an on-board energy storage system to effectively recycle captured kinetic energy obtained through regenerative braking. Although hybrid buses are capable of significantly reducing fuel consumption, they are still reliant on diesel as the primary fuel source and hence do not address the fundamental problems associated with emission that come from using diesel as a fuel. As such, there has in recent years been an increased focus on the development of zero emissions buses, with two main competing technologies. These are battery electric buses and hydrogen fuel cell (FC), both of which exhibit zero operating emissions, hence eliminates the environmental and health issues associated with diesel buses [11]. Such technology solutions are less mature and result in significant changes to the

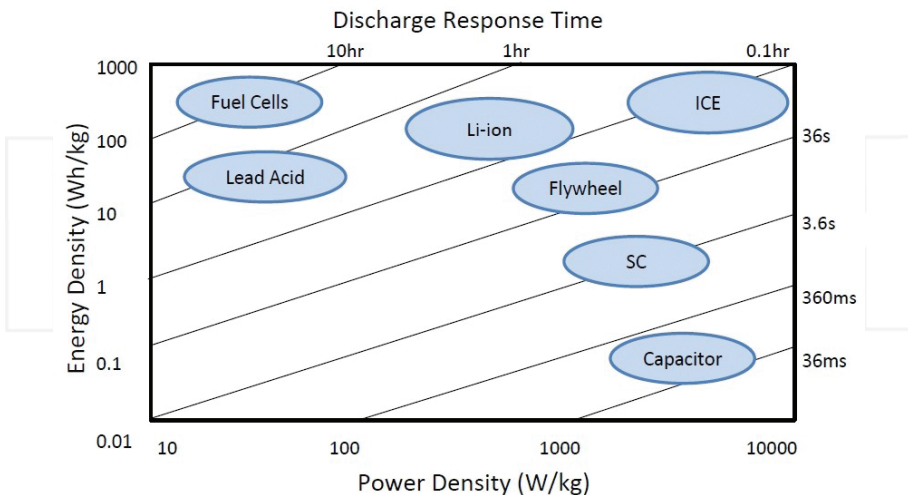


Figure 1. Comparison of various technologies for the power and energy densities (based on Ref. [10]).

propulsion system. Although these technologies have been deployed in operational bus fleets, there remain a number of barriers to widespread deployment.

London has one of the most comprehensive and busiest public transport networks in the world, operated by Transport for London (TfL). There are over 9000 buses in operation [12], which are estimated to account for 21% of the CO₂ emissions in London [7], 63% of NO_x and 52% of PM₁₀ particulate emissions [13]. It is reported that the TfL bus fleet carries 6 million passengers each working day, which the number of bus passenger journeys grew by 64% between 2000 and 2013 and is continuing to increase [14]. The Greater London Authority (GLA) has introduced a number of strategies in an attempt to reduce emissions from buses, part of which is the London hybrid bus project which aims to replace the conventional bus fleet with diesel hybrid buses [7, 15]. This is to be furthered with the introduction of the ultra-low emissions zone (ULEZ) in 2020, which, amongst other targets will require all 3000 double-decker buses operating in the ULEZ to be diesel hybrid and all 300 single decker buses to be zero emissions [8, 9, 16]. Since 2004, a number of technologies have been deployed as part of the operational bus fleet, as shown in **Figure 2**, as a means of reducing emissions. London has been used as a case study throughout this chapter due to both the comprehensive bus network and the operational deployment of new technologies.

Within this chapter, the development of low emission bus propulsion technologies will be discussed, through the evolution of diesel to diesel hybrid buses and onto the development and deployment of battery electric and FC buses. The aim is to outline the benefits of such technologies and the barriers that exist to their widespread implementation from both a technical and economic perspective. Part 2 discusses the implementation of diesel electric hybrid buses

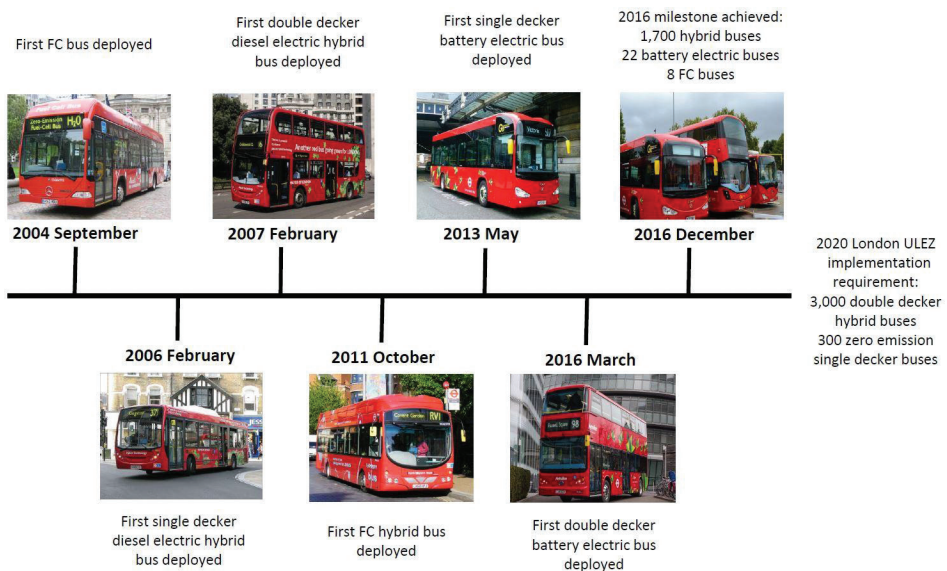


Figure 2. Timeline of the milestones for the London low emission bus deployment.

and their evolution from diesel buses. Parts 3 and 4 consider battery electric buses and fuel cell buses, respectively, whilst part 5 provides a comparison of these emerging technologies.

2. Diesel hybrid bus

2.1. Basic principles of diesel electric hybrid buses

The principle difference between diesel hybrid buses and diesel buses is the inclusion of an electrical energy storage system in conjunction with an electrical motor/generator. The primary source of energy is still the diesel engine; however, the inclusion of the electrical system provides a number of advantages such as facilitating regenerative braking and allowing reduced idling time [17]. The utilisation of a hybrid system results in improvements fuel efficiency and emissions, although these come at the price of additional cost and complexity [17].

The integration of the electrical energy system can be utilised through a number of configurations, with the common options being the series, parallel and series-parallel hybrid configurations, as shown in **Figure 3**. In a series hybrid drivetrain, the mechanical output from the diesel engine is converted into electrical power via a generator when operating at its most efficient loading. This is supplemented with a battery to provide for the electric drive motor

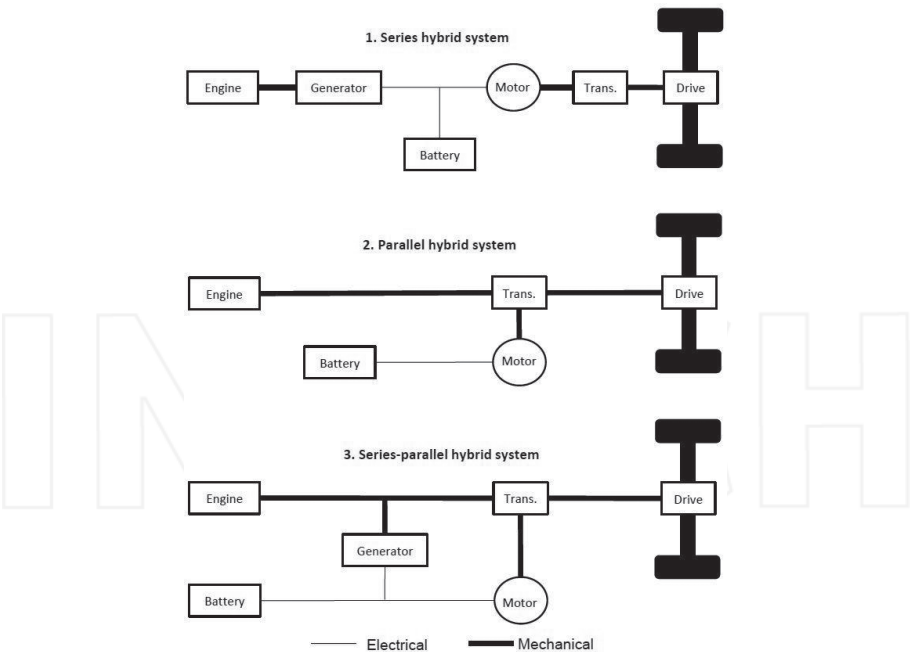


Figure 3. Schematic of the three available layouts for the propulsion system of a diesel/electric hybrid drive train.

requirements. Since the propulsion needs are met by an electric motor, this results in the complete decoupling between the diesel engine and the wheels, meaning that engine control is not dependent on vehicle speed so offering additional flexibility [18]. This is a major advantage of series hybrid drivetrains, where the engine can operate at any point on its speed-torque map, which is impossible for conventional vehicles. Therefore, the engine is capable of constantly operating at near optimum load, which minimises fuel consumption and emission [19].

The parallel hybrid configuration maintains the direct mechanical link between the diesel engine and the wheels, using the battery for regenerative braking and supplementing the peak power demands. The main advantages over the series hybrid are that the additional generator is no longer needed so has higher efficiency as well as reducing the size of the required drive motor. The parallel configuration, however, does not decouple the diesel engine from the wheels and hence operation is directly linked to the vehicle speed hence for low speed city operation the ICE will often operate at a low efficiency [20]. As a result, the parallel configuration is more appropriate for longer distance and higher speed routes. The series-parallel hybrid can operate in either the series or parallel configurations and so can utilise the advantages of both systems; however, the additional complexity and capital cost of the system mean that they are currently not a viable option for transportation applications [19]. The most popular option for city buses is the series configuration due to the simplicity of a single drive system as well as higher efficiency during city driving where buses have a start-stop traffic pattern with generally low speed operation [19].

The benefits offered by the hybridisation of the drive system relate to the increase in fuel economy and reduction in emissions compared to a diesel bus and can be attributed to the following points.

- On average buses idles for around 30–44% of urban driving time [21]. By using a hybrid system, the vehicle can turn off the engine to prevent idling and low loads because it can use the electrical energy storage and motor for initial acceleration. This can save 5–8% of fuel consumption [17].
- A significant amount of energy is lost and dissipated by heat due to friction during conventional braking. When a hybrid vehicle is braking, the drive motor can work as generator to charge the electrical energy storage system and thus recycle some of the energy used to propel the bus. Typically, 10–20% of the kinetic energy is recovered.
- In a conventional bus, the diesel engine needs to be large enough to provide for all of the peak transient power demands. A hybrid vehicle is able to use the electrical system to provide for a portion of these peak demands, and therefore, the engine can be downsized [17, 19].
- A diesel engine operates at its lowest efficiency during low load and low speed operation. The electrical system can drive the electric motor to power the bus during low load and start-up to avoid this. It is expected that diesel hybrid technology can achieve reductions of between 24 and 37% CO₂ emission [22], 21% to NO_x emission and 10% to fuel consumption compared with conventional diesel buses [7, 15].

In contrast to these benefits, the hybridisation of the drive system has a number of drawbacks. These predominately amount to the additional capital cost, where a diesel hybrid typically costs £300,000, this is £110,000 more than a conventional diesel bus and constitutes an increase of about 50% [23]. The additional complexity of both the drive system and its control results in additional maintenance time and cost, where a diesel hybrid typically requires 50% more maintenance time than a conventional diesel bus [22].

2.2. Case study 1: TFL

Initially a trial consisting of eight diesel hybrid buses was carried out in 2007 and was found to have very high (96%) customer support [24]. After analysing the trial, the official deployment of diesel hybrid buses began in central London. The number of diesel hybrid buses has steadily increased, where in 2015, more than 1200 diesel hybrid buses were in operation in London, as can be seen in **Figure 4**, and exceed the target of 1700 in 2016 [12]. This consists of old buses redesigned for hybrid operation and new designs such as the new Routemaster.

The impact of the deployment of the low emission bus fleets has already begun to have an impact on emissions in London, as shown in **Figure 5**. In the last few years, emissions of NO_x and CO_2 have begun to drop due to the introduction of diesel hybrid buses into the TfL fleet and the retrofitting of selective catalytic reduction measures into the existing fleet. The level of PM100 emissions dropped considerably due to the introduction of PM filters in the early 2000s. It is expected that these will continue to drop as further deployment of diesel hybrid and zero emissions vehicles continues.

The performance of the diesel hybrid bus fleet in London is very variable, as might be expected due to differing models and routes. It was claimed that the average Euro V bus

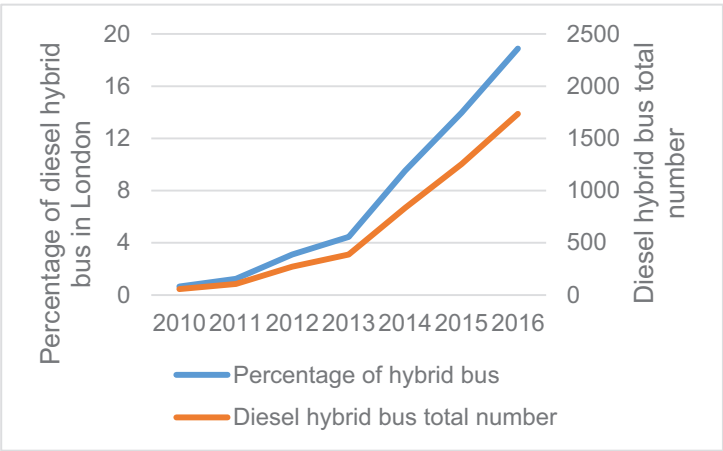


Figure 4. Total number and percentage of the TfL bus fleet of diesel-hybrid buses in operation. Data from Ref. [12].

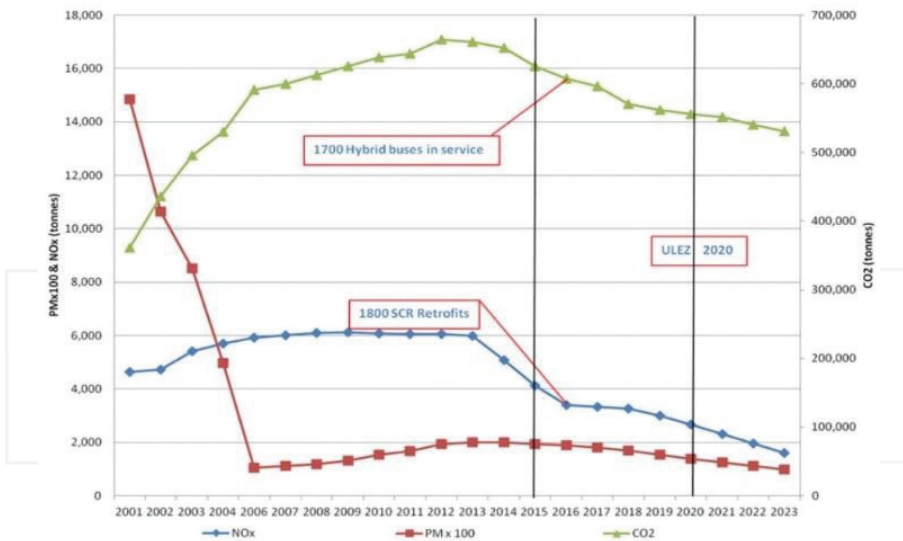


Figure 5. Expected reduction in CO₂ and NO_x emissions from the TFL bus fleet with the deployment of diesel/electric hybrid buses [1, 15, 25].

achieved a fuel economy of 32.9 l/100 km in London [9]. The reported fuel economy of diesel hybrid buses operating in London is presented in **Table 1**. As may be expected, the type of bus and bus route significantly affects the fuel economy, where a single decker bus generally exhibits a higher fuel economy than a double-decker bus. It was found that the introduction of diesel hybrid technology improved the fuel economy on nearly all routes; however, there were a couple of discrepancies to this, such as on the E8 bus route where the fuel economy actually decreased. The introduction of the new Routemaster bus appears to provide a slight improvement over previous diesel hybrid buses; however, there appears to be significant discrepancies between the recorded and expected performance. Results released by TfL in 2014 suggest a fuel economy in the range of 38.2–45.6 l/100 km, whereas it is claimed by the manufacturer that a fuel economy of 24.4 l/100 km was recorded on the 159 bus route. Unfortunately, the details for these results are not available and so it is difficult to determine the validity of the results. This discrepancy could be the result of a number of factors such as the route topology, traffic conditions, driving style and passenger conditions.

In summary, TfL has successfully introduced a large number of diesel hybrid buses into their bus fleet. This has resulted in a decrease in the emissions associated with the bus fleet, with considerable further reductions expected. It provides an example of the successful deployment of diesel hybrid buses into a large operational bus fleet to achieve reductions in emissions and fuel consumption. However, the increased cost and system complexity remain problematic.

Bus type	Route	Diesel	Diesel hybrid	Year	References
		Fuel economy (l/100 km)	Fuel economy (l/100 km)		
Single decker (Euro V)	276	44.8	43.5	2010	[26]
	360	36.7	34.9		
	371	34.1	26.7		
	E8	35.3	42.2		
	129	47.1	33.6		
Double decker (Euro V)	141	60.1	50.4	2010	[26]
	328	65.7	54.3		
	24	49.6	42.2		
	482	50.4	34.9		
	16	50.4	39.2		
New routemaster (Euro V)	11	60.1	38.2	2014	[27]
	24/390	52.3	38.2		
	9	72.4	45.6		
	148	56.5	40.9		
	10	64.2	43.5		
	159	Not available	24.4	2013	[28]

Table 1. Available data for diesel hybrid bus fuel economy in London. The values for l/100 km have been converted from miles per gallon using $\text{Litres}_{100\text{ km}} = (100 * 4.54609) / (1.609344 * \text{mpg}_{\text{uk}})$.

3. Battery electric bus

3.1. Overview of electric buses technology

The battery electric bus, often described as a pure electric bus, uses an electric motor for propulsion and a battery for energy storage [29]. In most cases the battery is the primary energy source, although for trolley buses power is delivered from overhead cables during operation.

The configuration for electric buses is typically fairly straightforward since it is basically a battery driving an electric motor to propel the vehicle [30], as shown in **Figure 6**. During braking it is also possible to make use of regenerative braking to recharge the battery during braking. The main battery technologies that have been used in transportation are Ni-MH, Zebra (Na-NiCL₂) and lithium batteries [31]. The most promising of these are the lithium batteries, where three main categories exist, these being Li-ion, lithium polymer (LiPo) and Lithium-iron-phosphate (LiFePO₄) batteries [32]. Most current buses use lithium-based batteries [33] due to their high power and energy densities and fast charging capabilities, although their high cost is still problematic [32]. A problem faced by all battery technologies is their cycle life; typically, these are short

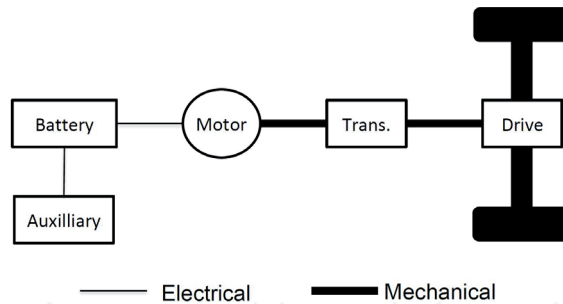


Figure 6. Battery electric drive bus basic configuration.

and hence require relatively regular replacement [34]. In addition to a battery pack, some buses utilise supercapacitors in conjunction with a battery as supercapacitors are much more effective in shielding batteries from high current load and thus increase battery life [35]; however, their low energy density means they are unsuitable to be used as the primary energy source, as shown in **Figure 1**. They do, however, have several key advantages over existing battery technologies, such as very high power densities and discharge rates as well as very long cycle life [34]. There is no simple answer to which battery technology is best, as it will depend on the application. Mahmoud et al. [36] carried out a detailed comparison study of different electric powertrains and concluded that a single technological choice would not satisfy the varied operational demands of transit services because electric buses are highly sensitive to the energy profile and operational demands. Electric buses are zero emission at the point of use and therefore offer great emission savings particularly in terms of local air pollution when compared to ICE or hybrid buses, as well as very high efficiency. However, there are a number of barriers to widespread deployment, the main ones are recharging time, vehicle range, infrastructure and cost [34].

Battery electric buses normally operate in one of two different forms: opportunity and overnight [32]. Opportunity e-buses have a smaller energy storage capacity that offers limited range but can be charged much quicker (5–10 minutes); while overnight e-buses have a much larger energy storage but at the cost of longer charging time (2–4 hour) [36]. These represent two different approaches for electric buses in the urban environment. The opportunity approach aims to minimise the weight of the battery pack by utilising frequent and fast recharging at points along the bus route, such as bus stops or the end of route [32]. This holds the promise of high efficiency and lower projected bus costs but requires a comprehensive recharging network [37]. Route flexibility of the bus is, however, limited, as it is required to follow the assigned bus route to recharge the battery. The overnight method utilises a large energy storage system to extend the range so that the bus can drive the entire route/day without recharging [37]. This holds the promise of greater route flexibility and convenience as well as utilising a centralised recharging infrastructure, but suffers from passenger loss due to increased battery weight as well as battery lifetime issues [38] and battery cost [34]. An alternative approach is offered by the Trolleybus, which has a small battery but receives power from overhead cables along the assigned route. This overcomes problems associated with range and recharging times but is very limited in terms of route flexibility.

The process of recharging a battery electric bus can be completed through plug-in (conductive), wireless (inductive) or catenary (overhead power lines) charging. Plug-in charging requires a direct connection through a power cord [39] and is well-suited to overnight bus charging, but can be used in some instances for opportunity charging. This is popular due to its simplicity and high efficiency [39]. Wireless charging relies on induction between two coils, this is better suited to opportunity buses where recharging can take place along the route without the need for a physical connection [39], such as the PRIMOVE bus where charging is carried out at each end of the route and at five intermediate stops [40]. This form of charging, however, suffers from increased charging times and relatively low efficiency [39]. The trolleybus uses overhead catenary to provide power to the bus [41]. This type of charging exhibits high efficiency but requires an extensive network of overhead cables.

Table 2 shows a selection of operating pure electric buses in different locations and utilise a number of battery technologies and operating approaches. In 2015, there were an estimated 150,000 battery electric buses, mostly located in China, with a sixfold increase between 2014 and 2015 [42]. The electric bus market is growing quickly where it had a 6% share of global bus purchases in 2012 but is forecasted to grow to 15% by 2020 [43]. Battery electric bus development has been carried out all over the world with the largest shares in China, Europe and North America [44]. It is clear that some of the buses listed in **Table 2** utilise more than one mode of operation to provide for the operational power requirements, such as the complete coach works bus, which uses both overnight and opportunity charging. The differences in

Manufacturer	Length	Capacity	Battery type	Battery capacity	Type, range	Deployment location
ABB TOSA	18 m	135	Lithium titanate oxide	38 kWh	Trolley, on-route	Switzerland
BYD	12 m	40	BYD Iron Phosphate	324 kWh	Overnight, 250 km	Worldwide
Complete Coach Works	12 m	37	Lithium-iron Phosphate	213 kWh	Overnight/opportunity, 145 km	US
EBusco	12 m	76	Lithium-iron Phosphate	242 kWh	Overnight, 250 km	China, Finland
Hengtong EBus	12 m	70	Lithium Titanate	60.9 kWh	Opportunity, 39 km	China
New Flyer	12 m	40	Lithium-Ion	120 kWh	Opportunity, 72 km	US, Canada
Primove	12 m	44	Lithium-Ion	60 kWh	Wireless, on-route	Germany
Proterra	10 m	35	Lithium Titanate	74 kWh	Opportunity, 42 km	US
Siemens	8 m	40	Lithium-iron Phosphate	96 kWh	Trolley, on-route	Austria
Sinautec	12 m	41	Ultra-Cap and Battery	5.9 kWh	Trolley, on-route	China

Table 2. Selection of operating electric bus models worldwide [40].

operating regimes are reflected in the sizing of the batteries and as a result the range of the buses, where they vary from 5.9 kWh for the trolleybus design to >300 kWh for overnight charging. This will have a significant impact in terms of the bus's battery costs; however, the charging infrastructure for overnight charging does not need to be as comprehensive as for the alternative methods.

3.2. Case study: London electric buses

London has been working on overnight e-bus demonstrations since 2012 and is also investigating the potential of opportunity e-bus technologies. From the overnight e-bus perspective, TfL has collaborated with BYD, which is one of the largest electric bus manufacturer in China, to test the potential of battery electric buses in London, starting from 2012 [45]. The first two battery electric buses were handed over to TfL in 2013 and then entered daily service on two central London routes, numbers 507 and 521, which were the first battery electric buses in London. These single-decker 12-metre BYD buses utilise Lithium-Iron-phosphate batteries and have demonstrated a range in excess of 250 km on a single charge in real world urban driving conditions [46]. The 507 and 521 bus routes are relatively short commuter service routes and were chosen so that the bus can start operating in the morning peak alongside the diesel bus fleet and return to the depot to recharge during the day before resuming service for the evening peak [34, 47]. The battery takes 4–5 hours to recharge when fully discharged and has been designed for a cycle life of more than 4000 cycles, meaning a 10-year battery lifetime under normal operating conditions [48]. The trail fleet was extended to six buses in the summer of 2014. The trail buses in London not only provide a zero emission environmental benefit but also have shown promising result in terms of both technical and economic performance, and hence TfL has taken further steps towards adopting this new clean technology in the capital. The development timeline and future plans for London electric buses are plotted in Figure 7.

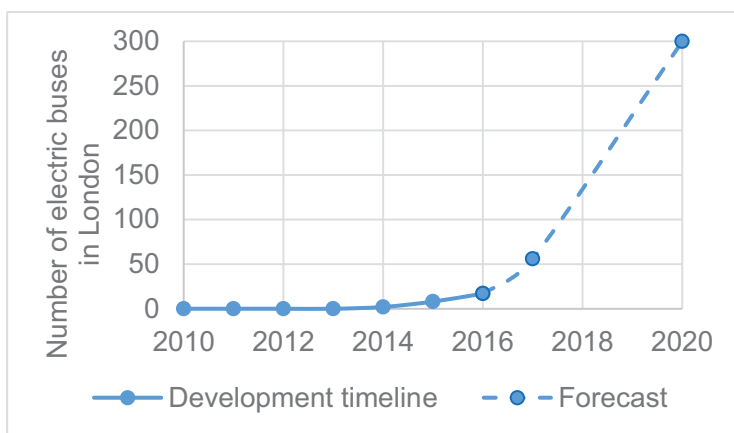


Figure 7. Number of electric buses in London.

The latest data in 2016 showed that there are currently 22 battery electric buses operating in London including 17 single-decker battery electric buses and five double-decker battery electric buses. This is a world first for double-decker battery electric buses, as shown in **Figure 8**, and entered service in May 2016. These are 10.2 m buses with a capacity of 81 passengers and a claimed range of 303 km. The battery is a Lithium-Iron-Phosphate battery with a capacity of 320 kWh [49]. They utilise a combination of both overnight and opportunity e-bus technology and will operate on route 69 in Central London. They will use a high powered wireless inductive charging system to top up their battery system at the beginning and end of this route to keep the bus operating throughout the entire day [50]. The recent double-decker electric buses have used wireless charging technology as part of innovative charging technology development. However, this is still far from a mature technology and requires a massive recharging infrastructure network [51]. The electric buses in London have shown promising performance on short commuter routes; however, pure e-buses are still best suited for shorter routes with operational flexibility and scope to recharge them in inter-peak periods due to the limit of present battery capacity and recharging technology [52].

In 2015, BYD and Alexander Dennis (ADL) announced a partnership to provide 51 further single-decker buses to route operator Go-Ahead with an expected delivery in late 2016 [53]. BYD will provide the batteries and electric chassis technology, and ADL will provide the bus body-building technology [54]. The cost of each bus is expected to be £350,000 [55].

In summary, the recent development and deployment of battery electric buses in London have shown that electric buses are technically feasible. It can be seen that electric buses will also have an important role to play in the coming ULEZ implementation in 2020. However, more time is needed to evaluate the actual performance and address the key challenges facing electric buses such as limitations of battery technology that restricts range.



Figure 8. The first electric double-decker bus in the world (photo from Business Green, 2016).

4. Hydrogen fuel cell hybrid bus

4.1. Basic theory

Hydrogen fuel cells (FCs) are considered a clean energy source with the main benefits over ICEs of zero harmful emissions during operation and high efficiency [56]. Although many types of FCs exist, this paper will only consider the application of FCs in transportation, considering the operating temperature, start-up time and technology maturity, Proton Exchange Membrane Fuel Cell (PEMFC) offer most promising solution [57]. Significant research into solid oxide fuel cells (SOFCs) in transportation has been carried out [58–60], although these have yet to be applied in real world bus applications. A PEM FC uses hydrogen as the fuel, which, through an electrochemical reaction with oxygen (usually from air) generates electricity with water as the only by-product from the chemical process [61]. By replacing the internal combustion engine in conventional buses, FCs can be used as the primary energy source to power a bus with electrical energy, therefore, achieving zero operating emissions. An additional advantage over ICE's comes from the higher efficiencies exhibited by FCs [62, 63]. However, there are a number of barriers that need to be overcome before widespread deployment can be achieved. These are primarily cost and infrastructure [64, 65]. FC powered buses cost approximately five times more than a conventional diesel bus with the similar power output [66], where they typically cost in excess of £1,000,000 [67], due primarily to the expensive FC stack and the small scale of production [68]. In addition, the widespread deployment of FC buses would require a significant investment in hydrogen refuelling infrastructure [64]. The implementation of FC buses has shown that the technology is a promising solution for zero emissions buses if these barriers can be overcome.

Figure 9 shows the configuration usually used in FC vehicles. The basic drive train utilises a FC to power the propulsion motor; however, FCs are not well suited to providing for the transient power demands associated with city driving buses [69–73]. As such, most FC buses utilise a form of energy storage in a series configuration to both address this and also to

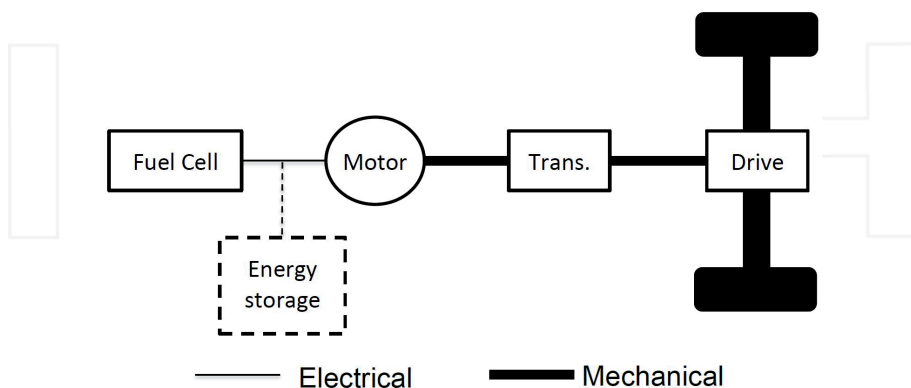


Figure 9. Simplified architectures of FC drivetrain.

utilise regenerative braking [74]. An additional benefit of such an approach is that the size of the expensive fuel cell stack can be reduced [75]. The energy storage implemented is usually either electrochemical battery technology such as Li-ion or NiCd batteries or electrostatic supercapacitors (sometimes referred to as ultracapacitors). The choice between these depends on the particular design and requirements of the system, with batteries offering reasonable power and energy densities although they have a relatively short cycle life and supercapacitors offering poor energy densities but excellent power densities, as shown in **Figure 1**. Additionally, supercapacitors have very long lifetimes of up to 40 years [31].

In a series configuration, there are three main modes of operation that can be utilised to provide for the buses power demands, as shown in **Figure 10**. Although these are the main modes of operation, the way these modes are utilised will depend on the control strategy implemented [76].

- Mode 1: The SC discharges to supplement the FC to provide for high transient power demands. This type of operation is expected to occur under heavy loads such as during acceleration or going uphill.
- Mode 2: The FC will both power the load and use excess power to charge the SC. This is expected to occur under low loads, when the FC power output is higher than the required load.
- Mode 3: The power from the FC and generated power from regenerative brake will both be used to charge the SC. This is only expected to occur when the drive motor is operating as a generator in the regenerative brake mode.

There have been a number of projects aimed at utilising FC technology for bus propulsion applications. **Table 3** lists many of the projects currently in operation along with the FC size and energy storage used. The projects are split into two main categories depending on the relative size of the FC and energy storage systems. The majority of the current projects are FC

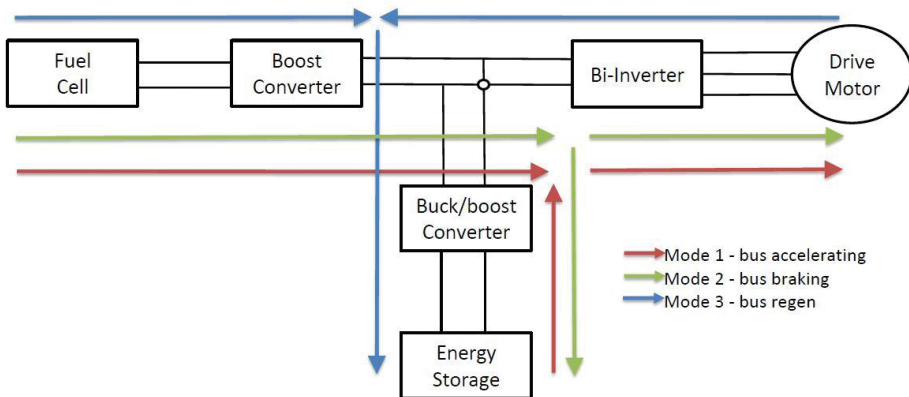


Figure 10. Modes of operation for a series hybrid FC drive train [77].

dominant, whereby the FC is expected to provide for the majority of the propulsion needs. Alternatively there are a few examples of battery dominant hybrids, where the battery is the main source of power with the FC used as a supplementary power source. It was announced in 2017 that the JIVE project is to implement 142 buses across nine European cities with 56 new FC buses in the UK, which will be the first large scale validation project of FC bus fleets [78].

4.2. Case study: TfL FC bus on the RV1 bus route

London has been involved with the testing and deployment of FC buses, **Figure 11** shows the evolution of FC bus implementation in London. Initially, this was through the EU funded Clean Urban Transport for Europe (CUTE) project, which aimed at introducing hydrogen FC buses into European cities, where a test run of three buses were operated on the RV1 bus route between 2004 and 2006, this was increased to five buses from 2007 to 2009 [83]. London is now part of Clean Hydrogen in European Cities (CHICs) project with the first deployment in full service of the next generation of FC bus in 2011 and is expected to continue until 2019. There are currently eight Hydrogen buses operating in Central London as part of the CHIC project, fully covering the RV1 bus route, which is 9.7 km in length [83]. It is expected that by 2017 a further two buses developed as part of the 3Emotion project will be deployed through Van Hool [84]. The buses operate for 16–18 hours/day, before returning to the depot for refuelling at the central depot, which takes <10 minutes [85]. The workshop, which is responsible for routine maintenances and hydrogen management, was specifically designed and built for hydrogen

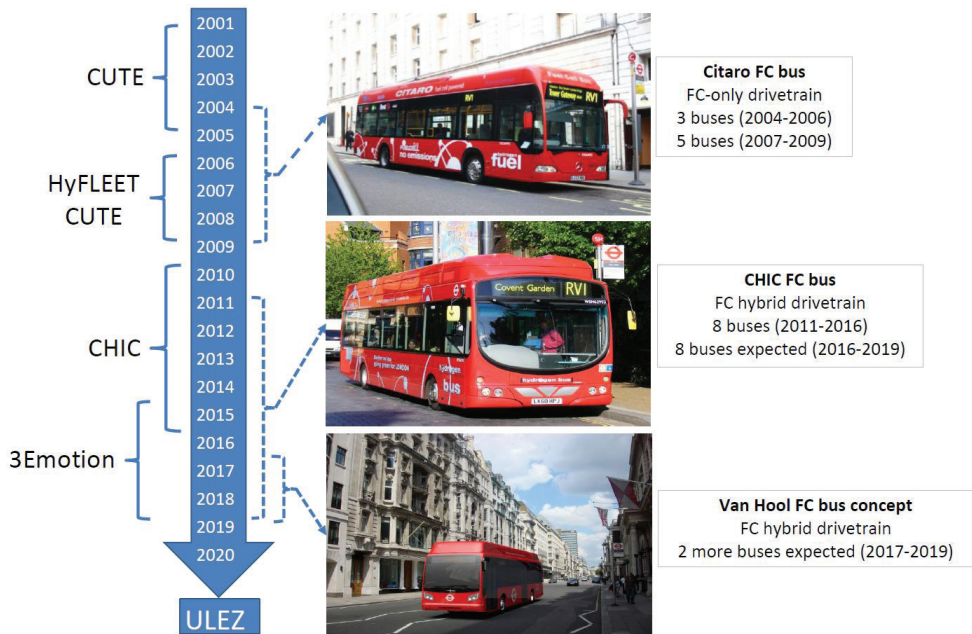


Figure 11. London FC hydrogen bus development timeline (bus photos from Citaro, TfL, Van Hool, 2016).

Project	Fleet	Year	Location	Length (m)	FC size (kW)	Battery type	Battery size (kWh)	Drive type
JHFC	2	2006	Tokoname, Japan	10.5	180	Nickel Metal Hydride	Not available	FC dominant hybrid
University of Delaware	2	2007	Dewark, US	6.7	40	NiCad	60	Battery dominant hybrid
TriHyBu	1	2009	Neratovice, Czech Republic	12	48	Lithium Ion	26	Battery dominant hybrid
BurbankBus	1	2010	Burbank, US	10.7	32	Lithium Titanate	54	Battery dominant hybrid
HySUT	2	2010	Tokyo, Japan	10.5	180	Nickel Metal Hydride	Not available	FC dominant hybrid
NFCBP	1	2010	San Francisco, US	12.2	32	Lithium Ion	Not available ³	FC APU Compound
Toyota FCHV	1	2010	Toyota City, Japan	10.5	180	Nickel Metal Hydride	Not available	FC dominant hybrid
NFCBP	4	2010	Hartford, US	12.2	120	Lithium Ion	17.4 ³	FC dominant hybrid
CHIC	8	2010	London, UK	12	75	Supercapacitor	0.5	FC dominant hybrid
CHIC	3	2011	Milan, Italy	11.9	120	Lithium Ion	26	FC dominant hybrid
SunLine ¹	6	2011	Thousand Palms, US	12.2	150	Nanophosphate Li-ion	11	FC dominant hybrid
NFCBP	12	2011	Multi-city, US	12.2	120	Lithium Ion	17.4	FC dominant hybrid
CHIC	4	2011	Cologne, Germany	18.4	150	NiMeH and Supercapacitor	23 and 0.6	FC dominant hybrid
CHIC	5	2011	Aargau, Switzerland	11.9	120	Lithium Ion ⁴	26.9 ⁴	FC dominant hybrid
CHIC	5	2012	Oslo, Norway	13	150	Lithium Ion	17.5	FC dominant hybrid
NIP, CHIC	6	2012	Hamburg, Germany	12	120	Lithium Ion	26	FC dominant hybrid
CHIC	5	2013	Bolzano, Italy	11.9	120	Lithium Ion	26	FC dominant hybrid
HyTransit, HighVLO City	14	2014	Aberdeen, UK	12.2	150	Not available	Not available	FC dominant hybrid
HighVLO City	5	2014	Brussels, Belgium	12.2	150	Not available	Not available	FC dominant hybrid
NFCBP ²	1	2014	Austin, US	10.7	30	Lithium Titanate	54	Battery dominant hybrid
NFCBP ²	1	2014	Birmingham, US	9.8	75	Lithium Titanate	54	Battery dominant hybrid

Notes: ¹[79], ²[80], ³[81], ⁴[82].

Table 3. All active fuel cell bus demonstration project in 2016.

FC buses [86]. The hydrogen has been transported in liquid form to the depot and converted into gaseous form to refuel buses [83], it is then stored on site in gaseous form at 500 bar [86].

The buses themselves have developed throughout this project, where the first generation was powered only by a FC. These utilised a 250 kW fuel cell [82] and achieved a hydrogen economy of 18.4–29.1 kg H₂/100 km [87]. The buses deployed as part of the CHIC project utilised a series hybrid configuration, with a 75 kW PEM FC from Ballard and a 0.5 kWh Bluways supercapacitor energy storage system [88]. This introduction of the hybrid system significantly reduced the hydrogen economy to <10 kg H₂/100 km [87] and is one of the most significant results of the CHIC project in London. **Figure 12** shows that the fuel economy of the buses operated as part of the CHIC project showed considerable improvements over those in the CUTE project. It can also be seen that the London buses performed better than the CHIC target, exceeding it by nearly 50%. For all of the London FC buses, the hydrogen is stored as a compressed gas at 350 bar, with the gas cylinders stored on the roof of the bus [82].

Between 2011 and 2016, the FC buses in operation in London have covered over 1.1 million kilometres [89], and a number of the FC buses have achieved the milestone of 20,000 hours of operation [90]. This reflects the improvement of availability seen over the course of the deployment of CHIC's London fleet. **Figure 13** shows the availability from January 2012 until May 2015. The monthly availability of London FC buses has also significantly increased after

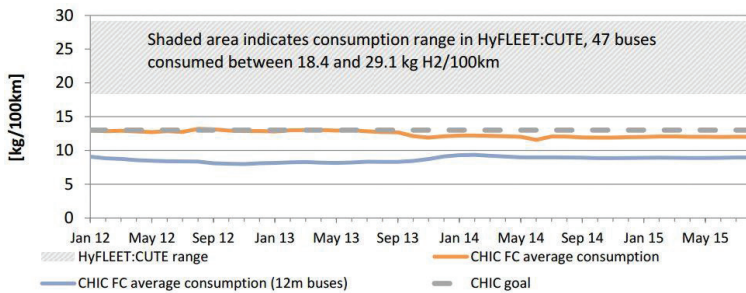


Figure 12. Average fuel consumption of FC buses in CHIC project (figure from FCH JU, 2016) [87].

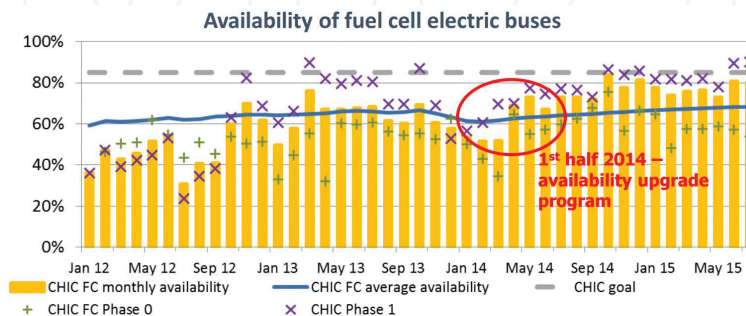


Figure 13. Availability of London FC buses in CHIC project (figure from FCH JU, 2016) [87].

the availability upgrade program carried out in 2014. The availability is expected to improve to over 85% by the end of the CHIC project as operators gain more operational and problem-solving experience.

Apart from the technical and economic improvements, the London trial buses have also proven that the technology became more viable because of the full working schedule, direct diesel replacement, centralised infrastructure and high public acceptance [86]. The trial test of FC-powered buses projects has provided promising performance as a long-term solution to zero emission transportation.

5. Comparison study

This part aims at to provide a comparison of the current state of low emission and zero emission bus systems. Diesel hybrid buses have been developed and deployed as a means of achieving emissions reductions, where a number of advantages in terms of efficiency, emissions and fuel consumption can be seen over diesel buses. There are, however, a number of problems associated with their widespread deployment. The first of these is the cost and is due to the additional components necessary for the electrical system. Second, the inclusion of the electrical system necessitates a significantly more complicated configuration [19]. Third, although diesel hybrid buses can offer significant improvements in terms of CO_2 and NO_x emissions, the primary energy source is still the ICE. As such, they fail to address the underlying source of emissions and are therefore fundamentally limited in the improvements that can be achieved. As such, they can only really be considered as a transitional technology to reduce emissions but are not a viable option for meeting zero emissions targets. In order to meet the requirements for zero emissions buses, which is the ultimate objective for a clean transportation network, technologies such as electric and FC buses have been developed as a long term solution for city bus transportation needs. Therefore, this section will mainly compare the battery electric bus (opportunity, overnight and trolley) and FC bus technologies as the two most promising zero emission solutions in terms of the operational requirements and is summarised in **Table 4**. The rankings are based on the authors' opinions with reasoning given in the paragraphs below.

Range: Opportunity e-buses have a smaller energy storage that requires frequent recharging, which equates to poor performance in terms of daily range. Overnight e-buses utilise a much larger battery, which increases the range with reported values of over 300 km per charge. Trolley e-buses are continuously powered with electricity by overhead lines along the route which effectively gives unlimited range. FC buses use hydrogen cylinders as the fuel tanks, which allow the range to be greatly extended (up to 450 km) for as much as hydrogen fuel cylinder weight and size allows [91].

Route flexibility: Opportunity and trolley e-buses require recharging infrastructures along the route which greatly limits their route flexibility. This is somewhat dependant on the size of the on-board battery and will likely be more acute for trolley e-buses. The overnight e-buses and FC buses are expected to be able to operate for an entire day's service without recharging

Zero emission option	Opportunity E-bus	Overnight E-bus	Trolley E-bus	Fuel cell bus
Daily range	4	3	1	2
Route flexibility	3	1	4	1
Refuelling time	2	3	Not available	1
Infrastructure	3	2	4	1
Fuel availability	1	1	1	4
Clean source	1	1	1	4
Cost	3	1	2	4

Notes: 1, best; 4, worst.

Table 4. High level comparison of operational performance of zero emission bus concepts.

or refuelling. As such this allows for much greater route flexibility. This appears to be easily achieved for FC buses, however for overnight e-buses this is not always the case and will again be dependent on the size of the battery.

Refuelling time: Opportunity e-buses require frequent recharging throughout the entire route. Although each recharges for the opportunity e-bus only takes up to 15 minutes, it is still considered as a drawback due to the requirement for regular recharging. Overnight e-buses require a longer recharging time (average >4 hours) after each operation due to the increased battery capacity. The recharging time is heavily dependent on the charging power. Trolley e-buses are charged through overhead wires so that they require no refuelling time. FC buses are refuelled with gaseous hydrogen, which can be completed quickly (<10 minutes) [91].

Infrastructure: Opportunity e-buses and trolley buses require corresponding infrastructure along the route and each end of the routes. Therefore, opportunity e-buses and trolley buses require a comprehensive infrastructure network. Overnight e-buses and FC buses both require infrastructure to recharge/refuel at the end of daily operation. This can, however, be centralised at the service depot and hence does not need to be as comprehensive. It appears, however, that the current recharging times for overnight e-buses presents a problem since it is likely that a significant number of recharging points and a massive recharging power would be needed to recharge the batteries of a large fleet in time for the next day's service. This could potentially be an issue for the electrical grid infrastructure if the number of buses grows significantly, while this would not be a problem for FC buses because of their short refuelling time.

Fuel availability: All three battery electric bus technologies use electricity to recharge their batteries. This electricity could be central managed and distributed locally through the local electricity grids; however, widespread electric bus deployment could significantly stress this infrastructure. FC buses will likely require the development of a comprehensive distribution network for hydrogen, although on-site hydrogen production has been demonstrated. Additionally, hydrogen fuel storage would also create additional cost.

Clean source: Real zero emissions bus technology needs to be clean throughout the manufacturing process, fuel production and bus operation. Currently, battery electric and FC bus

technologies can achieve zero operating emission but the lifetime emissions are much harder to quantify. It is hard to forecast how the emissions from new technology manufacturing will change, but the fuel production method can be roughly estimated. In the UK, the GHG emissions for electrical energy were $0.44932 \text{ kgCO}_2/\text{kWh}$ in 2014 [92]. This is likely to change as the UK's energy mix changes, where in 2015, 24.6% of electricity was generated from renewable energy sources [93]. Similarly, for FC buses, the source of hydrogen is critical in determining the overall emissions. Currently, about 96% of hydrogen is derived from fossil fuels [94] which results in $13.7 \text{ kgCO}_2/\text{kgH}_2$ [95]. Despite this, investigations into the use of renewable energy for hydrogen production through the process of electrolysis have been carried out offering potential for a low carbon source of hydrogen. Currently, electricity for battery electric buses is a cleaner fuel than hydrogen for FC buses.

Cost: Both electric and FC buses have higher capital costs than a conventional diesel bus; however, FC buses are currently far more expensive than electric buses. The capital cost of electric buses is somewhat dependant on the type of operation expected, where overnight buses will have higher costs than opportunity and trolley buses due to the increased battery capacity. This does, however, need to be weighed up against the cost of infrastructure, where opportunity and trolley buses require a comprehensive and expensive charging network. Overnight electric and FC buses on the other hand can make use of a centralised recharging/refuelling infrastructure.

Throughout this chapter, the main technologies being implemented to meet the low emissions requirements have been presented. The most promising for these in terms of zero emissions are electric and FC buses; however, it is clear that there are still significant barriers to their widespread implementation. Following on from the challenges identified in the comparison section a number of challenges for future developments have been identified.

For electric buses, it is clear that further improvements to battery technology are required in terms of their energy densities and lifetime as well as the development of an effective charging infrastructure. The challenges are somewhat dependant on whether the bus is intended to use the overnight or opportunity charging schemes. For overnight charging, the charging infrastructure can be centralised; however, this necessitates very large power requirements for the charging infrastructure, additionally the range of the buses needs to be addressed through battery developments. The opportunity charging schemes a comprehensive and distributed charging network. In most cases, this requires the development of high efficiency and power wireless charging technologies.

The future development of FC buses requires development in a broader range of areas. This includes further work on individual components such as the FC stack and hydrogen storage. The FC stack is still the most expensive component of the FC bus. The further development of the control strategies for hybridised buses held significant promise in reducing the size of the required FC stack and improving the fuel economy. Hydrogen storage is a key area for future research for bus applications, where technologies such as solid state storage offer potential to improve the storage density of hydrogen. For widespread implementation, the development of the hydrogen infrastructure is vital. This includes the production of hydrogen, particularly from clean sources, the distribution of hydrogen or on-site production and purification.

Acknowledgements

We wish to thank the Engineering and Physical Sciences Research Council (EPSRC) who have funded the HyFCap (Reducing the cost and prolonging the durability of hydrogen fuel cell systems by in-situ hydrogen purification and technology hybridisation) (grant number: EP/K021192/1) jointly carried out by University College London and University of Sheffield.

Author details

Julius Partridge, Wei Wu* and Richard Bucknall

*Address all correspondence to: w.wu.11@ucl.ac.uk

University College London, London, UK

References

- [1] Weston M, Emissions from the TfL bus fleet safety, accessibility and sustainability panel, Transport for London, 2015, pp. 11 <http://content.tfl.gov.uk/sasp-20150707-part-1-item07-reducing-emissions-from-the-bus-fleet.pdf>
- [2] IEA. Energy and Air Pollution World Energy Outlook, Special Report. 2016, pp. 13-16
- [3] Yamada H, Hayashi R, Tonokura K. Simultaneous measurements of on-road/in-vehicle nanoparticles and NO_x while driving: Actual situations, passenger exposure and secondary formations. *Science of Total Environment*. 2015; **563-564**:944-955
- [4] Degraeuwe B, Thunis P, Clappier A, Weiss M, Lefebvre W, Janssen S, Vranckx S. Impact of passenger car NO_x emissions and NO₂ fractions on urban NO₂ pollution—Scenario analysis for the city of Antwerp, Belgium. *Atmospheric Environment*. 2016; **26**(2):218-224
- [5] Cooper E, Arioli M, Carrigan A, Jain U. Exhaust emissions of transit buses: Sustainable urban transportation fuels and vehicles. 2012; **40**(4):1-40
- [6] TfL, Improving the health of Londoners, Transport action plan, greater London Authority, 2014, pp.32 <http://content.tfl.gov.uk/improving-the-health-of-londoners-transport-action-plan.pdf>
- [7] TfL. Transport emissions roadmap. Transport London, 2014; **1**:1-48
- [8] White P, Impacts of bus priorities and busways on energy efficiency and emissions, University of Westminster, 2015, pp.12 <http://www.greenerjourneys.com/wp-content/uploads/2015/09/Binder2.pdf>
- [9] Robb A, The new bus for London - diesel/electric hybrid, Clean fleets case study, Clean fleets, 2014. pp. 1-5 http://www.clean-fleets.eu/fileadmin/New_Bus_for_London_Case_Study_for_Clean_Fleets_-_final.pdf

- [10] Werkstetter, S, Ultracapacitor usage in wind turbine pitch control systems, Maxwell technologies white paper, 2015. pp.5 http://www.maxwell.com/images/documents/Wind_Turbine_Pitch_Control_White%20Paper_3000722_1.pdf
- [11] Bush T, Eaton S, et al, Air pollution in the UK 2013, Department for environment food & rural affairs, 2014. https://uk-air.defra.gov.uk/assets/documents/annualreport/air_pollution_uk_2013_issue_1.pdf
- [12] TfL, London bus fleet audit, Great London authorities, 2017, <http://content.tfl.gov.uk/bus-fleet-audit-130117.pdf>
- [13] TfL, Ultra low emission zone update to the London Assembly, Cleaner Air for London, 2014, <https://www.london.gov.uk/moderngov/documents/b9960/Minutes%20-%20Appendix%202%20-%20ULEZ%20Update%20Thursday%2006-Feb-2014%2010.00%20Environment%20Committee.pdf?T=9>.
- [14] Shawcross V. Bus services in London transport committee members. No. October, 2013.
- [15] Coyle F, Manager E, Emissions T. London buses emissions reduction. Transport London, 2010;1:1-14.
- [16] Plowden B, Ultra low emission zone (ULEZ) portfolio, Transport for London, 2015. <http://content.tfl.gov.uk/board-20151217-pt1-item12-ulez.pdf>
- [17] German J. Hybrid-Powered Vehicles, 2nd Ed. London: SAE International; 2011.
- [18] Herrmann F, Rothfuss F. Introduction to hybrid electric vehicles, battery electric vehicles, and off-road electric vehicles. In: Advances in Battery Technologies for Electric Vehicles, Elsevier, Woodhead Publishing Series in Energy; 2015. pp. 3-16.
- [19] Folkson R, Conventional fuel hybrid electric vehicles. In: Alternative fuels and advanced vehicle technologies for improved environmental performance towards zero carbon transportation, Woodhead publishing series in energy, 2014, pp. 632-654. http://www.sae.org/images/books/toc_pdfs/BELS078.pdf
- [20] Larminie J and Lowry J, Electric vehicle technology explained, 2nd ed, John Wiley & Sons, 2012. <http://ev-bg.com/wordpress1/wp-content/uploads/2011/08/electric-vehicle-technology-explained-2003-j-larminie.pdf>
- [21] Brightman T, Girmay S, Bhardwa M, Bus idling and emissions, Passenger transport executive group, 2010, pp. 80. http://www.urbantransportgroup.org/system/files/PTEGBusIdling_ResultsReportfinalv10.pdf
- [22] LCVP. The low emission bus guide. 2016. <http://www.lowcvp.org.uk/initiatives/leeb/Publications.htm>
- [23] Brown D, Hybrid buses - Surface transport panel, Transport for London, 2010, pp. 1-4. <http://content.tfl.gov.uk/Item07-Hybrid-Buses-STP-30-june-2010.pdf>
- [24] Sevigny E, Urban transportation showcase program - annual reviews 2006-2008, Transport Canada, 2009. http://publications.gc.ca/collections/collection_2012/tc/T1-6-2008-eng.pdf

- [25] Atkins P, Cornwell R, Tebbutt N, Schonau, Preparing a low CO₂ technology roadmap for buses, Ricardo LowCVP, 2013 <http://www.apcuk.co.uk/wp-content/uploads/2015/10/LowCVP-Ricardo-Bus-Roadmap-FINAL.pdf>
- [26] Ling B, Gilbey, TfL hybrid bus monitoring, Low carbon vehicle partnership, 2010, pp. 11-14. <http://www.lowcvp.org.uk/assets/workingdocuments/BWG-P-11-05%20TfL%20hybrid%20bus%20monitoring.pdf>.
- [27] TfL. New Routemaster buses on Route 453. 2014. [Online]. Available from: <https://tfl.gov.uk/info-for/media/press-releases/2014/october/new-routemaster-buses-on-route-453>
- [28] Wright, Wright bus spec sheet, The new bus for London featuring hybrid electric drive-line, Wright group, 2013, pp. 1-3. <http://www.wrightbusinternational.com/datasheets/Routemaster%20spec%20sheet.pdf>
- [29] Mapelli F, Tarsitano D, et al. A study of urban electric bus with a fast charging energy storage system based on lithium battery and supercapacitor, Ecological vehicles and renewable energies, IEEE, 2013. <http://ieeexplore.ieee.org/xpls/icp.jsp?arnumber=6521614>
- [30] Varga B, Iclodean C, Electric buses for urban transportation: assessments on cost, infrastructure and exploitation, Fascicle of management and technological engineering, 2015, pp. 253-258. <http://imtuoradea.ro/auo.fmte/files-2015-v1/Bogdan%20Ovidiu%20VARGA%20-%20ELECTRIC%20BUSES%20FOR%20URBAN%20TRANSPORTATION%20-%20ASSESSMENTS%20ON%20COST,%20INFRASTRUCTURE%20AND%20EXPLOITATION.pdf>
- [31] Tie SF, Tan CW. A review of energy sources and energy management system in electric vehicles. *Renewable and Sustainable Energy Review*. 2013;**20**:82-102
- [32] Yong JY, Ramachandaramurthy VK, Tan KM, Mithulananthan N. A review on the state-of-the-art technologies of electric vehicle, its impacts and prospects. *Renewable and Sustainable Energy Review*, 2015;**49**:365-385
- [33] California Environmental Protection Agency Air Resources Board. Technology Assessment: Medium- and Heavy-Duty Battery Electric Trucks and Buses. No. October, 2015;**2015**;1-91
- [34] Miles J, Potter S. Developing a viable electric bus service: The Milton Keynes demonstration project. *Research in Transportation Economics*. 2014;**48**:357-363.
- [35] Bubna P, Advani SG, Prasad AK. Integration of batteries with ultracapacitors for a fuel cell hybrid transit bus. 2012;**199**:360-366
- [36] Mahmoud M, Garnett R, Ferguson M, Kanaroglou P. Electric buses: A review of alternative powertrains. *Renewable and Sustainable Energy Review*. 2016;**62**:673-684
- [37] Göhlich D, Kunith A, Ly T. Technology assessment of an electric urban bus system for berlin. *WIT Transport Built Environment*. 2014;**138**:137-149
- [38] McKinsey. Urban buses: alternative powertrains for Europe, FCH JU, 2012. http://www.gppq.fct.pt/h2020/_docs/brochuras/fch-ju/20121029%20urban%20buses,%20alternative%20powertrains%20for%20europe%20-%20final%20report_0.pdf

- [39] Mohamed A, Ayob A, Faizal WM, Mahmood W, Zamri M, Wanik C, Siam MM, Sulaiman S, Azit AH, Azrin M, Ali M. Review on electric vehicle, battery charger, charging station and standards. *Research Journal of Applied Sciences Engineering and Technology*. 2014;7(2):364-373
- [40] Bloch-Rubin J, Gallo T, Tomic JB. Peak demand charges and electric transit buses. 2014;5605(626):744
- [41] Singh AP. A new design of current collector for electric trolley bus. In: *Transportation electrification conference, IEEE*, 2015. <http://ieeexplore.ieee.org/xpls/icp.jsp?arnumber=7386864>
- [42] IEA, Global EV outlook 2016 beyond one million electric cars, International energy agency, 2016. https://www.iea.org/publications/freepublications/publication/Global_EV_Outlook_2016.pdf
- [43] Kailasam C. Strategic analysis of global hybrid and electric heavy-duty transit bus market, Frost & Sullivan, 2012. http://academy.busworld.org/lib/plugins/fckg/fckeditor/userfiles/file/seminars/busworld/in_the_footsteps_of_prime_minister_modi/12_chandramowli_kailasam_-_strategic_analysis_of_global_hybrid_and_electric_heavy_duty_transit_bus_market.pdf
- [44] Zhou Y, Wang M, Hao H, Johnson L, Wang H, Hao H. Plug-in electric vehicle market penetration and incentives: a global review. *Mitigation and Adaption Strategies for Global Change*. 2015;20(5): 777-795
- [45] Masiero G, Ogasavara MH, Jussani AC, Risso ML. Electric Vehicles in China: BTD Strategies and Government Subsidies. *Statewide Agricultural Land Use Baseline*. 2015;1:2015.
- [46] Grutter J. Real world performance of hybrid and electric buses, Renewable energy & energy efficiency promotion in international cooperation, 2014. http://www.repic.ch/files/7114/4126/7442/Grutter_FinalReport_e_web.pdf
- [47] Payne M. New generation transport: sub mode options investigation. Metro. 2014. www.ngtmetro.com/WorkArea/DownloadAsset.aspx?id=4294968292
- [48] Brief TN. Chinese Electric Buses Enter Service in London. [Internet]. 2013. Available from: <http://www.transportnewsbrief.co.uk/news/chinese-electric-buses-enter-service-london/>
- [49] BYD. 10.2m double decker, RHD electric bus spec sheet. BYD group. 2015. http://www.bydeurope.com/downloads/eubs_specification/BYD_10_2_Meters_Electric_bus.pdf
- [50] TfL. ZeEUS project London demonstration. Mayor of London. 2015. <http://zeeus.eu/uploads/publications/documents/zeeus-london-leaflet.pdf>
- [51] Poulton M. Electric buses. No. July, 2011. www.triangle.eu.com/wp-content/.../LEVP-070714-Electric-Buses-Mark-Poulton.pdf
- [52] Poulton M. Electric buses. London electric vehicle partnership meeting. Transport for London. 2014. <http://unplugged-project.eu/wordpress/wp-content/uploads/2015/12/UNPLUGGED-Publishable-Final-Report.pdf>

- [53] ADL. BYD and ADL Partner to Supply Go-Ahead London with Capital's First, Large-scale Pure Electric Bus Fleet. [Internet]. 2015. Available from: <http://www.alexander-dennis.com/news/byd-and-adl-partner-to-supply-go-ahead-london-with-capitals-first-large-scale-pure-electric-bus-fleet/>
- [54] Manufacturer T. First-ever Electric Double-decker London Red Bus. [Online]. Available from: <http://www.themanufacturer.com/articles/first-ever-electric-double-decker-london-red-bus/>
- [55] LowCVP. Market Monitoring: London's First Electric Double Decker. [Internet]. 2016. Available from: http://www.lowcvp.org.uk/initiatives/lceb/marketing/news,londons-first-electric-double-decker_3417.htm
- [56] Andaloro L, Napoli G, Sergi F, Dispenza G, Antonucci V. Design of a hybrid electric fuel cell power train for an urban bus. *International Journal of Hydrogen Energy*, 2013;**38**(18):7725-7732
- [57] Eshani M, Gao Y, Gay S, Emadi A. *Modern Electric, Hybrid Electric and Fuel Cell Vehicles*, CRC press. 2nd ed. 2010.
- [58] Stoia T, Atreya S, O'Neil P. A Highly Efficient Solid Oxide Fuel Cell Power System for an All-Electric Commuter Airplane Flight Demonstrator. In: 54th Aerospace research central of AIAA association, 2016.
- [59] Andersson M, Sundén B. Technology review - solid oxide fuel cell. *Energiforsk*. 2015. http://www.elforsk.se/Programomraden/El--Varme/Rapporter/?download=report&rid=2015_136_
- [60] Steinberger WR. Study on the integration of an SOFC system into the on-board electricity system of the biogas bus. *Baltic Biogas Bus*. 2012. http://www.balticbiogasbus.eu/web/Upload/Use_of_biogas/Act_6_4/WP%206.4%20Final%20report_290812_ATI.pdf
- [61] Barbir F, Introduction. In: *PEM Fuel Cells*, Academic press. 2nd ed., Elsevier; 2013. pp. 1-16.
- [62] Villatico F, Zuccari F. Efficiency comparison between FC and ICE in real urban driving cycles. *International Journal of Hydrogen Energy*. 2008;**33**(12):3235-3242
- [63] Mekhilef S, Saidur R, Safari A. Comparative study of different fuel cell technologies. *Renewable and Sustainable Energy Review*. 2012;**16**(1):981-989
- [64] Eberle U, von Helmolt R. Fuel cell electric vehicles, battery electric vehicles, and their impact on energy storage technologies: an overview. In: *Electric and Hybrid Vehicles – Power Sources, Models, Sustainability, Infrastructure and the Market*. London: Elsevier; 2010. p. 242.
- [65] Giorgi L, Leccese F. Fuel cells: Technologies and applications. *Open Fuel Cells Journal*. 2013;**6**:1-20
- [66] Melo P, Ribau J, Silva, C. Urban bus fleet conversion to hybrid fuel cell optimal powertrains. *Procedia - social and behavioral sciences*. Volume 111. 2014. pp. 692-701. <http://www.sciencedirect.com/science/article/pii/S1877042814001049>

- [67] Stempien JP, Chan SH. Comparative study of fuel cell, battery and hybrid buses for renewable energy constrained areas. *Journal of Power Sources*, 2017;**340**:347-355
- [68] Element energy limited. Post-2014 London hydrogen activity: options assessment. Transport for London. 2014. <http://www.hydrogenlondon.org/wp-content/uploads/2013/10/HydrogenBuses-Post-2014-221012.pdf>
- [69] Atmaja TD. PEMFC optimization strategy with auxiliary power source in fuel cell hybrid vehicle. *The journal for technology and science*. 2012;**23**(1):25
- [70] Vural B, Boynuegri AR, Nakir I, Erdinc O, Balikci A, Uzunoglu M, Gorgun H, Dusmez S. Fuel cell and ultra-capacitor hybridization: A prototype test bench based analysis of different energy management strategies for vehicular applications. *International Journal of Hydrogen Energy*. 2010;**35**(20):11161-11171
- [71] Bizon N. Energy efficiency of multiport power converters used in plug-in/V2G fuel cell vehicles. *Applied Energy*. 2012;**96**:431-443
- [72] Sami BS, Abderrahmen BC, Adnane C. Design and dynamic modelling of a fuel cell/ultra capacitor hybrid power system. *Electrical engineering and software applications*. IEEE. 2013. <http://ieeexplore.ieee.org/document/6578382/>
- [73] Pany P, Singh RK, Tripathi RK. Performance analysis of fuel cell and battery fed PMSM drive for electric vehicle application. *Power, control and embedded systems*. IEEE. 2012. <http://ieeexplore.ieee.org/xpls/icp.jsp?arnumber=6508118>
- [74] Liukkonen M, Suomela J. Design of an energy management scheme for a series-hybrid powertrain. 2012 IEEE Transportation Electrification Conference and Expo, IEEE. 2012. pp. 1-6
- [75] Hoffmann P. *Tomorrow's Energy: Hydrogen, Fuel Cells, and the Prospects for a Cleaner Planet*, The MIT press. 2002.
- [76] Garcia P, Torreglosa JP, Fernandez LM, Jurado F. Control strategies for high-power electric vehicles powered by hydrogen fuel cell, battery and supercapacitor. *Expert System Appliances*. 2013;**40**(12):4791-4804
- [77] Wu W, Bucknall RWG. Conceptual evaluation of a fuel-cell-hybrid powered bus. In: *Proceedings of the University of Power Engineering Conference*, IEEE. 2013. pp. 0-4
- [78] Element energy. Strategies for joint procurement of fuel cell buses. The FCH JU. 2016. http://www.fch.europa.eu/sites/default/files/Strategies%20for%20joint%20procurement%20of%20FC%20buses_0.pdf
- [79] IFCBC. All Active Demonstrations. [Internet]. 2016. Available from: <http://gofuelcellbus.com/index.php/the-collaborative/all-active-demonstrations>
- [80] Eudy. L, Post M, Gikakis C. Fuel Cell buses in U.S. transit fleets: current status 2015. National renewable energy laboratory of U.S. department of energy. 2015. http://www.afdc.energy.gov/uploads/publication/fc_buses_2015_status.pdf
- [81] National fuel cell bus program. Demonstrating advanced design hybrid fuel cell buses in Connecticut. National renewable energy laboratory of Federal transit administration. 2011. http://www.nrel.gov/hydrogen/pdfs/nfcbp_fs3_jul11.pdf

- [82] HyFLEET:CUTE. Hydrogen transports - bus technology & fuel for today and for a sustainable future. European Union. 2009. http://gofuelcellbus.com/uploads/HyFLEETCUTE_Brochure_Web.pdf
- [83] Air Products. Bringing hydrogen to London's streets. 2009
- [84] 3Emotion. Van Hool Delivers Two Fuel Cell Buses for London. [Internet]. 2016. Available from: <http://www.3emotion.eu/news/van-hool-delivers-two-fuel-cell-buses-london>
- [85] Ballard. Case study-fuel cell zero emission transit for the city of London. FCvelocity. 2016. http://ballard.com/files/PDF/Bus/TfL_Case_Study_Nov_2016.pdf
- [86] Yorke D. The future is now an overview of the London hydrogen fuel cell bus project. First bus group. 2013. <http://www.h2fcsupergen.com/wp-content/uploads/2013/06/The-Future-is-Now-London-H2-Bus-Project-David-Yorke-TfL.pdf>
- [87] CHIC. London hydrogen buses and the CHIC project. Fuel cells and hydrogen joint undertaking. 2016. http://www.all-energy.co.uk/RXUK/RXUK_All-Energy/2016/Presentations%202016/Hydrogen%20and%20Fuel%20Cells/Ben%20Madden.pdf?v=635993507410544891
- [88] Tyler T, Core RD. Fuel Cell bus workshop. Bluways. 2011. http://gofuelcellbus.com/uploads/Bluways_IFCBW_2011.pdf
- [89] Hydrogen London. London: a capital for hydrogen and fuel cell technologies. Mayor of London. 2016. https://www.london.gov.uk/sites/default/files/london_-_a_capital_for_hydrogen_and_fuel_cell_technologies.pdf
- [90] Ballard. Fuel Cell electric buses; a solution for public transports. Ballard power systems group. 2016. www.h2fc-fair.com/hm16/images/forum/pdf/01monday/1240.pdf
- [91] Berger R. Fuel Cell electric buses- potential for sustainable public transport in Europe. Fuel Cells and hydrogen joint undertaking. 2015. http://www.fch.europa.eu/sites/default/files/150909_FINAL_Bus_Study_Report_OUT_0.PDF
- [92] BEIS. Government emission conversion factors for greenhouse gas company reporting. Department for business, energy & industrial strategy. 2016. <https://www.gov.uk/government/collections/government-conversion-factors-for-company-reporting>
- [93] DUKES. Renewable sources of energy. In: Digest of United Kingdom energy statistics. Department for business, energy & industrial strategy. 2016. https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/547977/Chapter_6_web.pdf
- [94] WNA. Transport and the Hydrogen Economy. [Internet]. 2016. Available from: <http://www.world-nuclear.org/information-library/non-power-nuclear-applications/transport/transport-and-the-hydrogen-economy.aspx>
- [95] Wu HJ, Parola VL, et al. Ni-based catalysts for low temperature methane steam reforming: recent results on Ni-Au and comparison with other Bi-Metallic systems. MDPI-Catalysts. 2013. <http://www.mdpi.com/2073-4344/3/2/563/html>

