

The critical role of the industrial sector in reaching long-term emission reduction, energy efficiency and renewable targets

Birgit Fais¹, Nagore Sabio, Neil Strachan
UCL Energy Institute, University College London

Abstract

This paper evaluates the critical contribution of the industry sector to long-term decarbonisation, efficiency and renewable energy policy targets. Its methodological novelty is the incorporation of a process-oriented modelling approach based on a comprehensive technology database for the industry sector in a national energy system model for the UK (UKTM), allowing quantification of the role of both decarbonisation of upstream energy vectors and of mitigation options in the industrial sub-categories. This enhanced model is then applied in a comparative policy scenario analysis on the various target dimensions on emission mitigation, renewable energy and energy efficiency at both a national and European level. Ambitious emission cuts in the industry sector of up to 77% until 2050 compared to 1990 can be achieved. Moreover, with a reduction in industrial energy demand of up to 31% between 2010 and 2050, the sector is essential for achieving the overall efficiency commitments. The industry sector also makes a moderate contribution to the expansion of renewable energies mostly through the use of biomass for low-temperature heating services. However, additional sub-targets on renewable sources and energy efficiency need to be assessed critically, as they can significantly distort the cost-efficiency of the long-term mitigation pathway.

Keywords: Energy system analysis; industry sector; emission reduction; renewable energies; energy efficiency; policy interaction

1. Introduction

In recent years, the number of national greenhouse gas (GHG) emissions mitigation targets and strategies has increased considerably accompanied by a trend to implement these targets through a mix of different, often sector-specific, policy instruments [1]. In addition to limits on GHG emissions, many countries have formulated targets for the use of renewable energies and progress in energy efficiency making the issue of target and policy coordination essential [2]. Within the global effort of keeping the temperature rise below 2°C, the UK introduced the Climate Change Act in 2008. Through this legally binding framework the UK has formally committed to a GHG emission reduction of 80% by 2050 compared to the level in 1990 and a portfolio of instruments, including an electricity market reform, energy taxes as well as incentive measures for renewable heat and energy efficiency in buildings has been introduced ([3] & [4]).

In many past analyses on the possible pathways to reach these targets, a strong focus has been put on the evaluation of the mitigation potentials on the energy supply side, particularly the decarbonisation of the electricity sector. Demand-side analyses and modelling has generally focused on the more homogenous transport and buildings sectors. Yet, it is essential to consider the industrial sector in its contribution to energy policy goals and its interactions with the rest of the energy system.

¹ Corresponding author: Birgit Fais, email: b.fais@ucl.ac.uk

41 At the global level, the industrial sector is responsible for over a third of energy demand and a slightly
42 higher emissions share ([5] & [6]). In its 5th Assessment Report, the IPCC placed the industrial sector
43 as the most pollutant end-use sector, even before buildings and transport [7]. In the UK, the industrial
44 sector currently accounts for about a quarter of total greenhouse gas emissions (including indirect
45 emissions from electricity use) and almost a fifth of final energy consumption with the most energy-
46 intensive subsectors (iron and steel, cement and other non-metallic minerals, non-ferrous metals, pulp
47 and paper, chemicals) being responsible for more than two thirds of these emissions [8]. In the future,
48 the industry sector will face the dual challenge of implementing low energy and low carbon technolo-
49 gies while simultaneously maintaining international competitiveness. In addition to the national ener-
50 gy and climate policy, the future development of the UK industry sector is also affected by the EU-
51 wide legislation which, in addition to emission reduction, sets explicit targets for the progress in ener-
52 gy efficiency and the use of renewable energies across the whole energy system ([9] & [10]).

53 As discussed in detail in Chapter 2, assessing the possible contribution of the industry sector to a mul-
54 ti-faceted energy transition poses a considerable challenge given the heterogeneity of the sector in
55 terms of the manufactured products, the production processes and technologies applied, all within a
56 systems context of competing resources and alternate end-use applications of energy vectors. Bottom-
57 up energy system models constitute powerful tools to analyse long-term emission reduction pathways
58 in a systematic manner with the advantages of including a high level of technological detail and tak-
59 ing all interactions within the energy system into account. Detailed modelling of actual production
60 processes and accounting for the substantial differences between industrial subsectors is a bespoke
61 process that can yield fresh insights, although often with exogenous assumptions on energy systems
62 interactions.

63 This paper has two primary objectives:

- 64 1) to present a novel process-oriented modelling approach for the industry sector (the disaggregated
65 hybrid module or DHM) integrating a comprehensive bottom-up technology database into a new-
66 ly developed national energy system model (UK TIMES Model or UKTM); and
- 67 2) to assess the UK industry sector's possible long-term contribution system-wide targets within the
68 scope of a comparative scenario analysis of overlapping policies of decarbonisation, efficiency
69 and renewable energy.

70 Chapter 2 provides a review on the current modelling representation of the industry sector in an ener-
71 gy system context. Focusing on the UK as a modelling and policy exemplar, after a short description
72 of UKTM, the new methodology for representing the industry sector in a more disaggregated manner
73 is presented in Chapter 3. Chapter 4 outlines the overlapping policy analysis and the comparative sce-
74 nario assumptions. The main results of the scenario analysis, focusing on the industry sector, are out-
75 lined in Chapter 5. The paper concludes with a discussion of findings and policy implications in
76 Chapter 6.

77 **2. Modelling of the industry sector in an energy system context²**


78 Since the industry sector is a highly heterogeneous sector in terms of its energy use, modelling the
79 future development of industrial energy demand as well as policy design is a substantial challenge
80 [11]. Other energy end-use sectors, especially the residential and transport sector are in comparison
81 more homogenous with respect to their energy service demands, such that modelling approaches in
82 whole system models are generally more straightforward (cf. for example [12], [13], [14] for the resi-
83 dential sector; and [15], [16], [17] for the transport sector).

84 A variety of recent studies have evaluated the energy savings and emission reduction potentials of
85 different industrial subsectors from a sector-specific perspective (cf. for example [18], [19], [20], [21],
86 [22], [23] & [24]). These analyses explore the industrial production routes in great detail, but look at
87 the industrial subsectors in isolation. However, in order to evaluate the industry sector's long-term
88 contribution to emission mitigation and other energy policy targets, a more comprehensive modelling
89 approach is required.

90 On the other hand, bottom-up energy optimisation models which cover the entire energy system have
91 long been applied to determine cost-efficient and consistent long-term pathways for a low-carbon en-
92 ergy transition and to analyse interactions and the competition for resources as well as low-carbon
93 energy vectors in the system. Yet, given the scope and complexity of these models, traditionally a re-
94 latively simple modelling approach for the industrial sector based on the different types of energy ser-
95 vice or end-use demands has often been chosen (see for example the representation in UK MARKAL
96 [25] or in the global ETSAP-TIAM model [26]).

97 This approach is generally characterized by the use of abstract process technologies which provide
98 different types of energy services (like low or high temperature heat, motor drive, drying, etc.). That
99 means that instead of representing the actual production steps and specific technologies required to
100 produce a certain final product, the energy service demands and their potential provisions through
101 different fuels are represented in a generic manner (usually using the same cost and technology as-
102 sumptions for each sub-sector). Each process technology has one specific fuel as input which is used
103 to produce one specific energy service. In a second step, a dummy demand technology (not represent-
104 ing an actual production process) aggregates the various energy service demand categories (usually
105 with fixed shares for each category) in order to produce the final end-use demand (usually specified in
106 units of useful energy). Figure 1 provides a stylized representation of this approach.

² This short review focuses on the representation of the industrial sector in technology-oriented, bottom-up energy system models. There are two additional main thrusts of industrial energy modelling that are important but are not the focus of this paper. Firstly, multi-regional input-output models analysing issues of direct versus indirect emissions and the possible offshoring of energy use and resultant emission leakage (cf. for example [31], [32] & [33]). Secondly, macroeconomic modelling approaches focusing on the wider macro-economic implications of changed prices in the industrial subsectors and potential restrictions on industrial output (cf. for example [34], [35] & [36]).

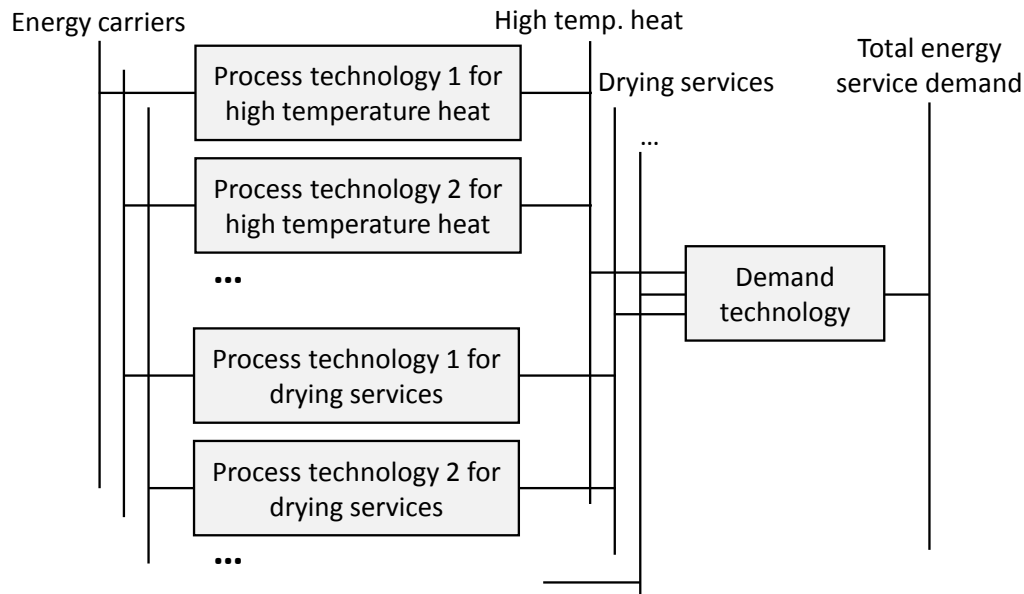

107
108 **Figure 1:** Example of an industrial modelling approach based on energy service demands

109 The advantage of modelling by end-use demands is that the sector can be represented through a small
110 number of components, while still allowing for the characterisation of energy uses and cross-sectoral
111 substitutions. This approach is mainly suited to evaluate the potential for fuel switching in the indus-
112 try sectors. However, several shortcomings need to be taken into account when applying this method-
113 ology:

- 114 • Given that the actual process technologies in the various industrial subsectors are not explicitly
115 modelled, important technological constraints can often not be accounted for or only approximated
116 with this approach. For example, the use of the electric arc furnace route in steel-making is limited
117 by the availability of metal scrap.
- 118 • This also implies that radical technological changes in the production processes, which are espe-
119 cially needed in the case of ambitious emission reduction targets, cannot directly be included in the
120 model approach. This drawback becomes particularly evident when thinking about technologies
121 with carbon capture and storage (CCS).
- 122 • In addition, if the actual process technologies are not modelled, it is difficult to account for process
123 emissions and, more importantly, to include mitigation options for these emissions.
- 124 • Although energy systems models focus on energy flows, it is evident that materials are an im-
125 portant part of the system, especially in the industry sector. Such material flows can only be repre-
126 sented when the actual process technologies are modelled.

127 In light of these problematic issues, attempts have been made in recent years to improve the represen-
128 tation of the industry sector in bottom-up energy system models. In general, it can be observed that
129 modelling improvements are strongly focused on the energy-intensive subsectors. The European en-
130 ergy model PRIMES still represents the industry sector through end uses, but includes a large variety
131 and differentiates them by subsector (e.g. sinter making in iron and steel) [27]. The energy-economy
132 modelling system NEMS uses a detailed process flow approach for energy-intensive manufacturing
133 industries with homogenous products, while for more heterogeneous subsectors the end-use approach
134 is chosen [28]. The ETP model contains a stock accounting simulation model for five energy-
135 intensive sectors with a detailed representation of the process technologies in the different production
136 routes [29]. Similar to the new approach chosen for UKTM described below, the JRC-EU-TIMES

137 model represents energy-intensive industries in a detailed, process-based manner and uses a generic
138 structure based on end uses for the remaining industrial subsectors [30]. In all cases it is, however,
139 difficult to obtain information on the underlying cost and technology assumptions used for the indus-
140 trial modelling approaches.

141 The novelty of the modelling approach with UKTM consists mainly in its link to a comprehensive
142 process-oriented database on industrial production processes and future potentials of innovative tech-
143 nologies. Thus, UKTM does not only provide a representation of the industrial sector with a higher
144 level of detail on production technologies than most current energy system models, but this technolo-
145 gy data is based on a consistent and publicly available database. This also makes it easier to replicate
146 the approach in other geographical energy system contexts.

147 **3. Model and methodological approach**

148 **3.1. The national energy system model UKTM**

149 The quantitative scenario analysis is conducted with the new national UK TIMES energy system
150 model (UKTM). UKTM has been developed at the UCL Energy Institute over the last two years as a
151 successor to the UK MARKAL model [25], It is based on the model generator TIMES (The Integrated
152 MARKAL-EFOM System), which is developed and maintained by the Energy Technology Systems
153 Analysis Programme (ETSAP) of the International Energy Agency (IEA) [37].

154 UK MARKAL and now UKTM have been major underpinning analytical frameworks for UK energy
155 policy making and legislation from 2003 to 2013 ([38], [39], [40] & [3]). With the aim to increase the
156 transparency in energy systems modelling and to establish an active user group – including key deci-
157 sion makers – an open source version of UKTM will be released in 2015 which will be updated on a
158 regular basis. Moreover, UKTM will continue to be the central long-term energy system pathway
159 model used for policy analysis at the Department of Energy and Climate Change (DECC) and the
160 Committee on Climate Change (CCC), including the 5th Carbon Budget Report which sets the limit on
161 GHG emissions in the UK for the period from 2028 to 2032 and feeds into the UK’s negotiating posi-
162 tion at the United Nations Climate Change Conference (COP 21) in December 2015. First research
163 outputs based on UKTM are [41] and [42].

164 UKTM is a technology-oriented, dynamic, linear programming optimisation model representing the
165 entire UK energy system (as one region) from imports and domestic production of fuel resources,
166 through fuel processing and supply, explicit representation of infrastructures, conversion to secondary
167 energy carriers (including electricity, heat and hydrogen), end-use technologies and energy service
168 demands. Generally, it minimizes the total welfare costs (under perfect foresight³) to meet the exoge-
169 nously given sectoral energy demands under a range of input assumptions and additional constraints
170 and thereby delivers an economy-wide solution of cost-optimal energy market development.

171 The model is divided into three supply side (resources & trade, processing & infrastructure and elec-
172 tricity generation) and five demand sectors (residential, services, industry, transport and agriculture).
173 All sectors are calibrated to the base year 2010, for which the existing stock of energy technologies
174 and their characteristics are taken into account. A large variety of future supply and demand technolo-
175 gies are represented by techno-economic parameters such as the capacity factor, energy efficiency,

³ UKTM is run in a dynamic manner. The assumption of perfect foresight means that all investment decisions in each period are made with full knowledge of the input assumptions for future periods (e.g. on fuel prices or technology costs).

176 lifetime, capital costs, O&M costs etc. Moreover, assumptions are laid down concerning energy prices,
177 resource availability and the potentials of renewable energy sources, etc. UKTM has a time resolution
178 of 16 time-slices (four seasons and four intra-day times-slices). In addition to all energy flows,
179 UKTM tracks CO₂, CH₄, N₂O and HFC emissions. For more information on UKTM see [43].

180 **3.2. New modelling approach for the industrial sector: disaggregated hybrid module**


181 The new industrial sector module in UKTM is composed of eight subsectors⁴. A more detailed model-
182 ling approach has been incorporated for the most energy-intensive branches of the UK industry, while
183 for the remaining sectors the already mentioned conventional methodology based on aggregated ser-
184 vice demands (ASD) is maintained. See Figure 2 for a simplified structure of UKTM and the new in-
185 dustrial modelling approach.

186 The development of a more detailed, process-oriented modelling approach for the industry sector de-
187 pends hugely on the availability of comprehensive and reliable data on current and future industrial
188 production process. The new industrial module in UKTM is based mainly on the technological and
189 economic data provided in the *Usable Energy Database (UED)*. It provides both the baseline energy
190 use and emissions by technology in 2010 and a wide range of possible future improvement technolo-
191 gies for a number of energy-intensive industry sectors in the UK [44]⁵. One of the major challenges in
192 linking the UED to UKTM was to select the most relevant future technology options (as the UED
193 provides up to 50 options per sub-sector) and represent them correctly in an energy systems modelling
194 context. This was done on the basis of their energy or emissions saving potential and the associated
195 costs. Highly uncertain technologies have been constrained or fully excluded from the modelling ap-
196 proach.

197 Based on the UED, the energy-intensive industry sectors iron & steel, cement and paper are modelled
198 in a process-oriented manner, meaning that the actual production processes are represented in the
199 model. With respect to future technology choices, different options to reduce energy demand and
200 emissions are taken into account: (1) exploitation of already commercial technology options with
201 higher energy efficiency or less carbon-intensive energy inputs, e.g. a stronger switch to the electric
202 arc furnace steelmaking route, the use of precalciners and kilns with increased waste utilisation in ce-
203 ment production or autothermal reforming in ammonia production; (2) improvement potentials for
204 already installed process technologies, e.g. heat recovery in different sectors, scrap preheating in elec-
205 tric arc furnaces or online moisture management in the paper industry and (3) more radical process
206 changes, e.g. carbon capture and storage technologies (CCS), low-carbon cement options, alternative
207 steelmaking routes (MIDREX, HISARNA, etc.) or Fischer-Tropsch processes in steam cracking.
208 Growth constraints are put on all major technology groups to ensure realistic future technology de-
209 ployment rates.

⁴ Mining and refining processes are included in the resources & trade and the processing sectors of UKTM.

⁵ The UED can be downloaded here: http://data.ukedc.rl.ac.uk/cgi-bin/dataset_catalogue/view.cgi.py?id=15

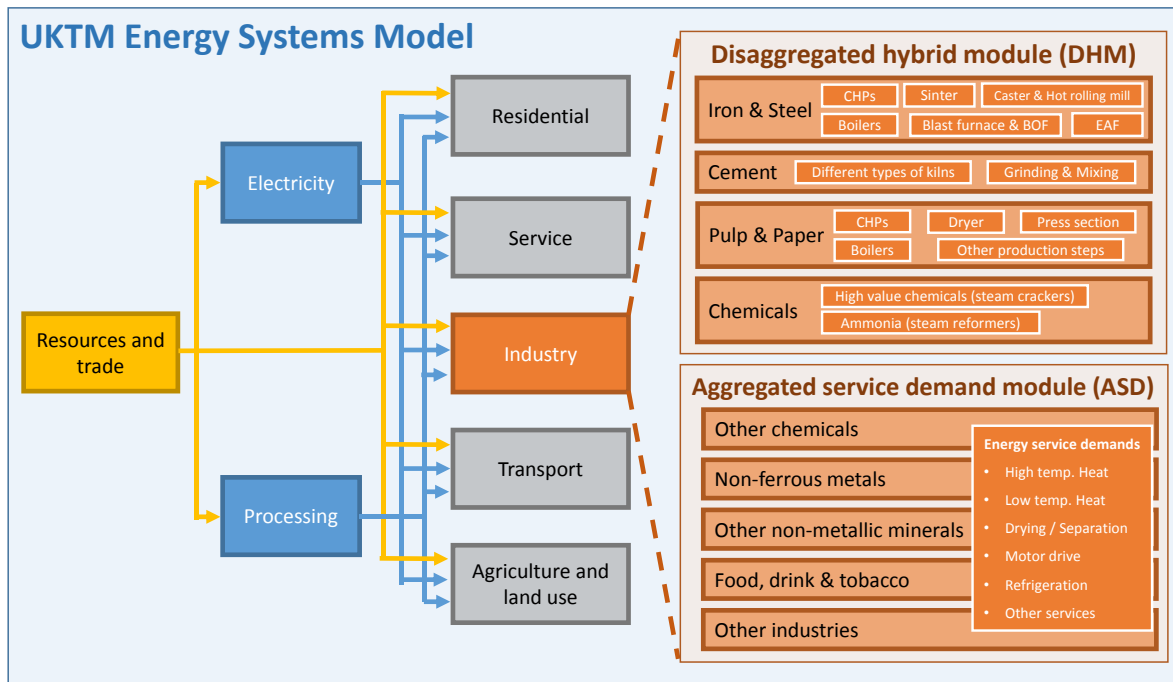

210
 211 **Figure 2:** Overview of the UKTM Energy Systems Model and the Integration of the new industrial model-
 212 ling approach

213 The chemicals sector is highly heterogeneous. In the model, it has been decided to separate the pro-
 214 duction of high value chemicals (olefins) and ammonia and model these subsectors in a process-based
 215 manner. High value chemicals are responsible for about a quarter of energy demand of the entire
 216 chemicals sector and also consume a high share of fuels for non-energy use. The separate modelling
 217 of ammonia is of particular importance to take the process-related emissions of this subsector into
 218 account.

219 The remaining industrial subsectors (other chemicals, non-ferrous metals, other non-metallic minerals,
 220 food, drink and tobacco as well as other industries), which are either comparatively small (in terms of
 221 their energy demand and/or GHG emissions) or less energy intensive and have a highly heterogeneous
 222 production structure, are modelled using the traditional ASD approach described above based on dif-
 223 ferent energy service demand categories. The data on the current industrial energy demand according
 224 to different energy service categories is taken from [45]. In the model, a differentiation is made be-
 225 tween the six most important energy services (high temperature processes, low temperature processes,
 226 drying/separation, motor drive, refrigeration, and others). The technology and cost data for the various
 227 process technologies in these subsectors are mainly taken from the previous UK MARKAL model
 228 with updated cost data for low temperature heat and drying/separation processes.

229 **4. Policy assumptions and scenario description**

230 The scenario analysis with UKTM is based on standard socio-economic assumptions, most important-
 231 ly an average GDP growth rate of 2.4% p.a. [46] and a rise in population of 0.5% p.a. [47] over the
 232 period from 2010 to 2050. From that, consistent drivers for the various energy service demands in the
 233 end-use sectors are developed taking also a variety of national forecasts on the development of house-
 234 hold growth, employment, transport demand, etc. into account. The demand projections for the indus-
 235 try sector are mainly based on the econometric DECC Energy and Emissions Projections model

236 (EEP)⁶ (**Error! Reference source not found.**). It has to be noted that in case of the process-oriented
 237 sectors the demand projections describe changes in aggregate output, while in the case of the remain-
 238 ing sectors both changes in output and energy intensity are taken into account.

239 **Table 1:** Demand projections for the industry sector in UKTM (based on the DECC EEP model)

Demand driver, 2010 = 1	2010	2015	2020	2030	2040	2050
Iron and steel	1	0.92	0.90	0.87	0.83	0.80
Cement	1	1.01	1.01	1.00	0.97	0.89
Paper and paper products	1	0.90	0.87	0.81	0.75	0.70
Chemicals	1	0.94	0.92	0.89	0.87	0.84
Non-ferrous metals	1	0.92	0.90	0.87	0.83	0.80
Other non-metallic minerals	1	1.01	1.01	1.00	0.97	0.89
Food, drink and tobacco	1	0.92	0.96	1.03	1.12	1.20
Other industries	1	0.84	0.83	0.80	0.78	0.75

241 The assumptions for fossil fuel prices are based on results from the global energy system model
 242 TIAM-UCL [48] with a world market price for crude oil of 90\$⁷ per barrel in 2050. The availability
 243 and costs for bio-energy, both domestic resources and imports, are adopted from [49] (medium as-
 244 sumptions of the Extended Land Use Scenario). With respect to future technology costs, exogenous
 245 learning rates are applied, especially in the case of less mature electricity and hydrogen technologies,
 246 assuming that the UK is a price taker for globally developing technologies. A global discount rate of
 247 3.5% p.a. for the first 30 years and 3% afterwards is used based on [50]. In addition, sector-specific
 248 discount rates are included to reflect the varying private costs of capital by sector (10% for all energy
 249 supply sectors as well as the industry, agriculture and service sectors, 7% for transport and 5% for the
 250 residential sector; based on [51] and [52]). In order to take into account adjustments in energy service
 251 demand due to changes in energy prices, the elastic demand variant of TIMES is used [37]. The long-
 252 run own-price elasticities that are attached to the demand categories are based on [53] and range be-
 253 tween -0.03 and -0.7.

254 With the aim to assess the contribution of the UK industry sector to major energy and climate policy
 255 targets, the comparative scenario analysis takes both the national climate policy framework and the
 256 overarching policy targets on EU level into account. In light of the rising number of targets and
 257 measures in energy and climate policy, the issue of policy interactions gains in importance and must
 258 be accounted for when aiming at a coordinated and consistent policy mix [54]. Modelling multiple
 259 policy targets and especially instruments increases the complexity of the scenario analysis but pro-
 260 vides valuable insights ([55] & [56]). The policy scenarios in the analysis at hand are constructed such
 261 that the interactions between the overall GHG reduction target and the sub-targets on energy efficien-
 262 cy and renewable energies can be evaluated (see Table 2).

⁶ A description of the DECC EEP model can be found in [65]. The actual model runs underlying the demand projections for UKTM have not been published.

⁷ All monetary values stated in this paper are in real terms, with 2010 as base year.

263 **Table 2:** Policy scenario overview

Scenario name	National GHG reduction target	EU Emission Trading	Energy efficiency target	Renewables target
BASE	No long-term policy targets			
GHG	-80% until 2050 compared to 1990	-	-	-
GHG_RE		Carbon prices for the ETS sector and the Non-ETS sector until 2030	-	Renewable share: 15% in 2020, 20% in 2030, 50% in 2050
GHG_EE			Annual reduction rate for final energy consumption: 0.9%	-
GHG_RE+EE				Renewable share: 15% in 2020, 20% in 2030, 50% in 2050

264 In addition to the baseline scenario BASE, which assumes no long-term energy or climate policy tar-
 265 gets and is used as a benchmark, Table 2 details four low-carbon scenarios with varying assumptions
 266 on the consideration of the EU targets on emission mitigation, energy efficiency and the use of renew-
 267 able energy sources are analysed. This allows both to assess the impact of the various targets on the
 268 UK energy system in general as well as the industry sector in particular and to explore the interactions
 269 between the various target dimensions. In the scenario GHG only the national legislation on GHG
 270 emission limits is accounted for, including the four five-yearly carbon budgets that have been fixed so
 271 far until 2027 [4] and the long-term target of a -80% reduction until 2050 compared to 1990. In order
 272 to give the model flexibility with respect to the timing of emission reductions the long-term target is
 273 implemented via a cumulative budget constraint which results in the same total amount of emissions
 274 as a linear reduction pathway to -80% until 2050 would.

275 The three other low-carbon scenarios also consider the EU regulations on emission reduction in form
 276 of the European Emissions Trading System (EU ETS) and the national reduction targets for the non-
 277 ETS sectors as stipulated in the Effort Sharing Decision [57]. Modelling supranational emission trad-
 278 ing schemes in national energy system models such that both the certificate price and the national
 279 contribution to emission reduction are reflected correctly is relatively complex [55]. Here a simplified
 280 approach both for the ETS and the Non-ETS sector is chosen by setting exogenous carbon prices
 281 based on the central projections of the Supplementary Appraisal Guidance on valuing energy use and
 282 greenhouse gas emissions from the DECC / HM Treasury Green Book [58]. It is assumed that the sec-
 283 tor-specific EU ETS will remain in force until 2030 before it is substituted by a wider emission con-
 284 trol system which is reflected in the model by the long-term national target of -80%. In the EU ETS,
 285 certificate prices are projected to stay at a comparatively low level of about 5 £/ton of CO₂eq until
 286 2020 and to rise gradually to 72 £/ton of CO₂eq until 2030. For the non-ETS sectors, carbon prices
 287 increase from 57 £/ton of CO₂eq in 2015 to 72 £/ton of CO₂eq in 2030 (thus converging with the EU
 288 ETS).

289 In addition to emission reduction, the EU Climate and Energy Package [9] specified separate targets
 290 for energy savings and the use of renewable sources acknowledging their dominant role in emission

291 mitigation. In line with these “20-20-20” targets⁸, the UK committed to raise the share of renewable
292 sources in gross final energy consumption to 15% until 2020 compared to 5% in 2013 [59] and to cut
293 final energy consumption by 18% compared to the 2007 business as usual projection for 2020 [60].
294 Similar EU-wide goals for 2030 were decided in 2014, with a GHG emission reduction of at least
295 40%, a minimum renewable share of 27% and an increase in energy efficiency of at least 27% [10].
296 No national targets have been fixed for 2030. For this scenario analysis, the 2030 renewable target for
297 the UK has been determined based on the relation between the EU and the UK targets for 2020 result-
298 ing in a renewable share in gross final energy consumption of 20.25%. For the reduction in final ener-
299 gy consumption, the EU target of 27% has been directly applied to the UK. Compared to 2010, this
300 relates to a reduction in final energy consumption (excluding non-energy fuel use) of 8% until 2020
301 and of 16% until 2030.

302 There is less clarity on the EU-wide targets on renewable energies and energy savings after 2030. In
303 the scenario assumptions, the annual reduction rate in final energy consumption of 0.9% between
304 2010 and 2030 is extrapolated until 2050 leading to a fall in the UK’s final consumption of 30% until
305 2050. Moreover, a minimum renewable share of 50% is assumed for 2050 which implies a compara-
306 tively conservative target level [61]⁹. In the three low-carbon scenarios reflecting EU energy and cli-
307 mate policy, GHG_EE, GHG_RE and GHG_RE+EE, different combinations of the energy efficiency
308 and renewable targets for the UK are included.

309 5. Results of the comparative scenario analysis

310 5.1. Overall energy consumption in the industry sector

311 First of all, the development of total final energy consumption in the UK industry sector under the
312 different scenario assumptions is given in Figure 3. In 2010, industrial energy demand is dominated
313 by natural gas (36%) and electricity (27%) and is responsible for about 20% of total final energy de-
314 mand. Already in the base case industrial energy consumptions drops by almost a quarter (315 PJ)
315 between 2010 and 2050. This can be attributed to the expected decline in production (responsible for
316 about 12% of the reduction, cf. **Error! Reference source not found.**), the shift to high-value, less
317 energy-intensive subsectors, and as some of the modelled energy efficiency measures become cost
318 efficient in the base case due to the rise in fossil fuel prices.

319 When implementing the 80% GHG reduction target, total final energy consumption in the UK indus-
320 try sector remains at about the same level as in the base case over the projected period. Here, two op-
321 posing trends need to be taken into account. On the one hand, a stronger emphasis is put on energy
322 efficiency measures, especially in the paper industry and by using more efficient boilers in the less
323 energy-intensive subsectors. On the other hand, the use of CCS technologies in the iron and steel, ce-
324 ment and chemicals industries from 2030 onwards raises the energy demand in these sectors com-
325 pared to the base case. Natural gas remains the dominant fuel for the provision of low temperature


⁸ On the European level, the targets are: (1) a reduction of GHG emission of 20% compared to 1990; (2) a renewable share of 20% in gross final energy consumption and (3) a reduction of energy consumption of 20% compared to a previously specified baseline.

⁹ No upper limit is put on the share of intermittent renewables in electricity generation. A variety of studies have shown that renewable shares of up to 80% would be technically feasible ([66], [67] for the UK, [68] for the European Union) – and even at manageable cost. While the necessary back-up capacity for intermittent renewables is accounted for in UKTM, it has to be noted that other system effects and costs (in terms of required storage capacity, grid expansion and demand response) are not fully reflected in such a comprehensive energy system model.

326 heat. Moreover, a small amount of hydrogen is used in boilers from 2045 onwards which is produced
 327 from natural gas reforming and biomass gasification in centralized dedicated plants with CCS.

328 The comparative scenario analysis shows that in the industry sector the influence of the additional EU
 329 targets on renewable sources and energy efficiency only becomes visible after 2030. While in the sce-
 330 nario GHG the industrial demand for biomass remains on almost the same low level as in the base
 331 case, in GHG_RE biomass contributes with 210 PJ (22%) to industrial energy consumption (mainly
 332 for the provision of low-temperature heat) in 2050 which is almost three times more than in GHG.
 333 Furthermore, the implementation of the renewable target also leads to a considerable increase in in-
 334 dustrial electricity use due to the substantial contribution of electricity generation to the renewable
 335 share (further discussed in Chapter 5.4).

336 The implementation of the energy efficiency target (scenario GHG_EE) only triggers significant addi-
 337 tional energy savings in the industry sector after 2040 highlighting that further efficiency efforts in the
 338 industry sector are quite costly. The 10% decrease in final energy demand in the scenario GHG_EE
 339 compared to GHG in 2050 can be mainly explained by the reduced use of CCS technologies in the
 340 chemicals and cement industries. The scenario results also show that no hydrogen is used in the indus-
 341 try sector when the efficiency or the renewable target is implemented. This is due to the fact that the
 342 low-carbon generation of hydrogen with CCS is no longer needed as mitigation option because of the
 343 additional efforts in terms of energy efficiency or renewable energies.

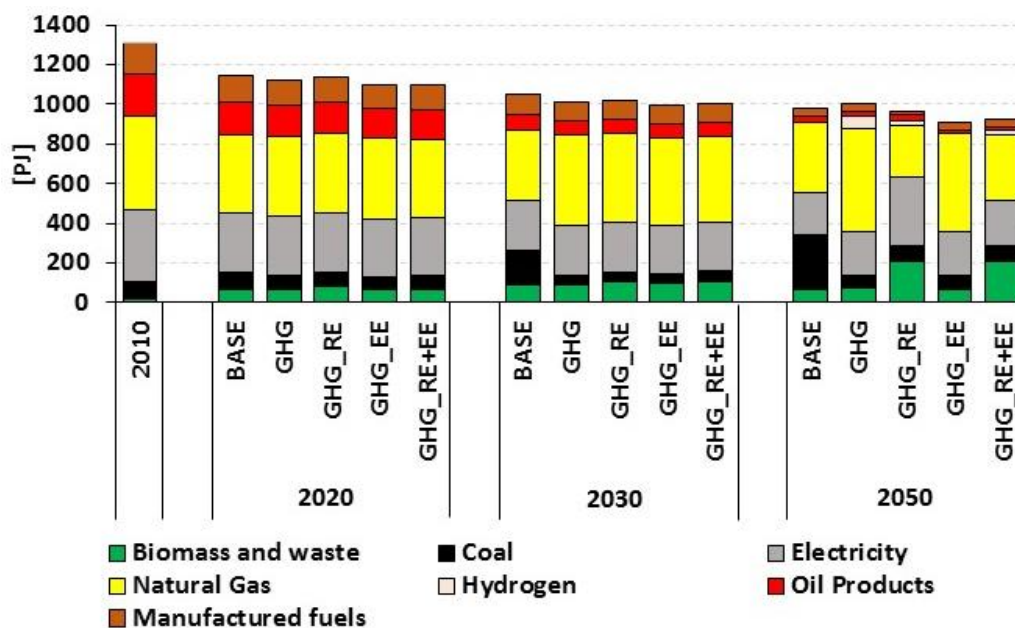

344 **Figure 3:** Final energy consumption in the UK industry sector
 345

346 The scenario GHG_RE+EE, which complies both with the renewable and the energy efficiency target,
 347 exhibits a combination of the effects observed for the industry sector in GHG_RE and GHG_EE with
 348 an increased use of biomass and limited deployment of CCS. Due to the competition with centralized
 349 zero-carbon electricity generation options and the limited availability of bioenergy, a general down-
 350 ward trend in the use of industrial CHP plants can be observed in all GHG scenarios after 2020 with a
 351 slightly higher contribution in the scenarios where the efficiency target is implemented.¹⁰

¹⁰ Please note that several sensitivity analyses have been conducted on key input assumptions in UKTM (most importantly on the availability of low-carbon electricity options, biomass resources, fossil fuel prices, tech-

352 **5.2. Technology trends in the most energy-intensive industrial subsectors**

353 The main added value of the new industrial modelling approach is the increased process-level detail in
354 the most energy-intensive subsectors. The representation of individual technologies and production
355 routes provides more clarity on how substantial transition pathways can actually be achieved and al-
356 lows to analyse the interaction between different mitigation options (e.g. fuel switching vs. efficiency
357 improvements vs. CCS). To highlight the additional insights that this new modelling approach can
358 deliver, the final energy consumption for those sectors which are modelled in a process-oriented man-
359 ner in UKTM is shown in Figure 4. In addition, detailed figures on the technology evolution for the
360 most important production steps in these sectors under the different scenario assumptions can be
361 found in the Annex (see Figure A-1 to A-5).


362 About three quarters of the steel production in the UK is currently produced through the coke oven -
363 blast furnace route, while the remaining share relies on the substantially less energy and emission in-
364 tensive electric arc furnace route. The expansion of the latter option is, however, constrained in the
365 model due to the limited availability of metal scrap. Because of the comparatively long technology
366 lifetimes and the current overcapacities in the UK steel industry, hardly any differences in the sector's
367 final energy consumption can be observed between the scenarios in the mid-term. After 2030, a shift
368 to more efficient blast furnaces (top-gas recovery and HIsarna steelmaking processes) is cost efficient
369 both in the base case and the low carbon scenarios, with the difference that in the GHG scenarios the
370 CCS variants of these production processes are installed. In the iron & steel sector, CCS capacities are
371 less affected by the implementation of the energy efficiency target than in other energy-intensive sub-
372 sectors. With respect to the electric arc furnace route, a shift to Comelt furnaces occurs in all low-
373 carbon scenarios. Other new production technologies, like the ULCORED or MIDREX direct reduced
374 iron route, do not become competitive. In general, the technology choices are quite similar under the
375 different scenario settings (Figure A-1). Differences in the fuel use occur with respect to boilers:
376 while hydrogen boilers are used after 2040 in the central GHG scenario, they are displaced by natural
377 and blast furnace gas in the scenario GHG_EE (as hydrogen production with CCS is no longer re-
378 quired as mitigation option) and by biomass when the renewable target is implemented.

379 In the UK cement industry both semi-wet, semi-dry and dry kilns are currently in use. The first two
380 types will be gradually substituted by the more efficient dry kilns in the future. Apart from coal, large
381 amounts of industrial waste are used in these kilns. The use of precalciners as well as the option to
382 reduce the amount of clinker required per unit of cement by substituting for other materials will be
383 extended considerably under all scenario settings. From 2025 onwards, the more energy efficient flu-
384 idised bed kilns become competitive in all scenarios and are deployed with increased waste utilisation
385 in the scenarios with the renewable target. In contrast to the iron and steel industry, the long-term de-
386 velopment of the cement sector is strongly influenced by the implementation of the energy efficiency
387 target (Figure A-2), showing the completely different dynamics of these sectors, which can only be

nology cost, etc.). Unfortunately, these additional analyses cannot be discussed in detail here. To summarize, the industry sector reacts relatively sensitive to the electricity price (if relevant low-carbon electricity options like nuclear and CCS are removed) switching to a higher use of biomass and even stronger efforts in terms of energy efficiency. Constraints on biomass availability only play a crucial role in the scenarios with renewable target (putting an even stronger weight on renewable electricity generation). The hydrogen use in the industry sector depends strongly on the availability and cost of hydrogen production in centralized CCS plants, while the removal of CCS in industry leads to a higher trend to electrification. The industry sector is also relatively sensitive to the gas price, leading to a stronger use of biomass and electricity in cases with high fossil fuel prices. Comparatively small changes occur when technology costs are increased, given the scale of the decarbonisation challenge.

388 analysed by using a process-oriented approach. While heavy reliance is put on kilns with CCS in the
389 scenarios GHG and GHG_RE, carbon capture disappears almost completely in the scenarios comply-
390 ing with the efficiency target. As an alternative mitigation option UKTM contains a “low-CO₂” ce-
391 ment production process representing technologies like Novacem, E-Crete, Celitement or Aether. Due
392 to the high uncertainty of these technologies, relatively high cost assumptions are laid down and their
393 share in total cement production is limited to 20% in 2050. Nevertheless, in order to fulfil the target
394 on final energy consumption, this low-carbon option is exploited in the scenarios GHG_EE and
395 GHG_RE+EE.

396 For the paper industry, the modelling approach concentrates mainly on improvement options for the
397 existing production technologies. While none of these efficiency options are applied in the base case,
398 a strong increase in energy efficiency in paper production is realized in all low-carbon scenarios. The
399 most prominent efficiency options include online moisture management, the switch to impulse drying,
400 as well as several improvements to the press section. With the efficiency target in place, a gradual
401 shift to the alternative production route dry sheet forming also occurs after 2030 (Figure A-3). Due to
402 the large demand for low temperature heat, the paper industry takes a prominent role in the use of bi-
403 omass when the renewable target is introduced. The equally high biomass demand in the base case
404 can be explained by the availability of low-cost bioenergy resources (which come directly from the
405 paper production and recycling processes) for which in all the low-carbon scenarios the paper industry
406 has to compete with alternative, potentially more valuable usage options (especially in combination
407 with CCS). Similar to the iron and steel industry, hydrogen boilers are deployed after 2040 in the cen-
408 tral GHG case, but disappear in the other low-carbon scenarios as the mitigation option of using of
409 low-carbon hydrogen (produced in centralized CCS plants) is replaced by the additional efforts in
410 terms of energy efficiency and/or renewable energy use.

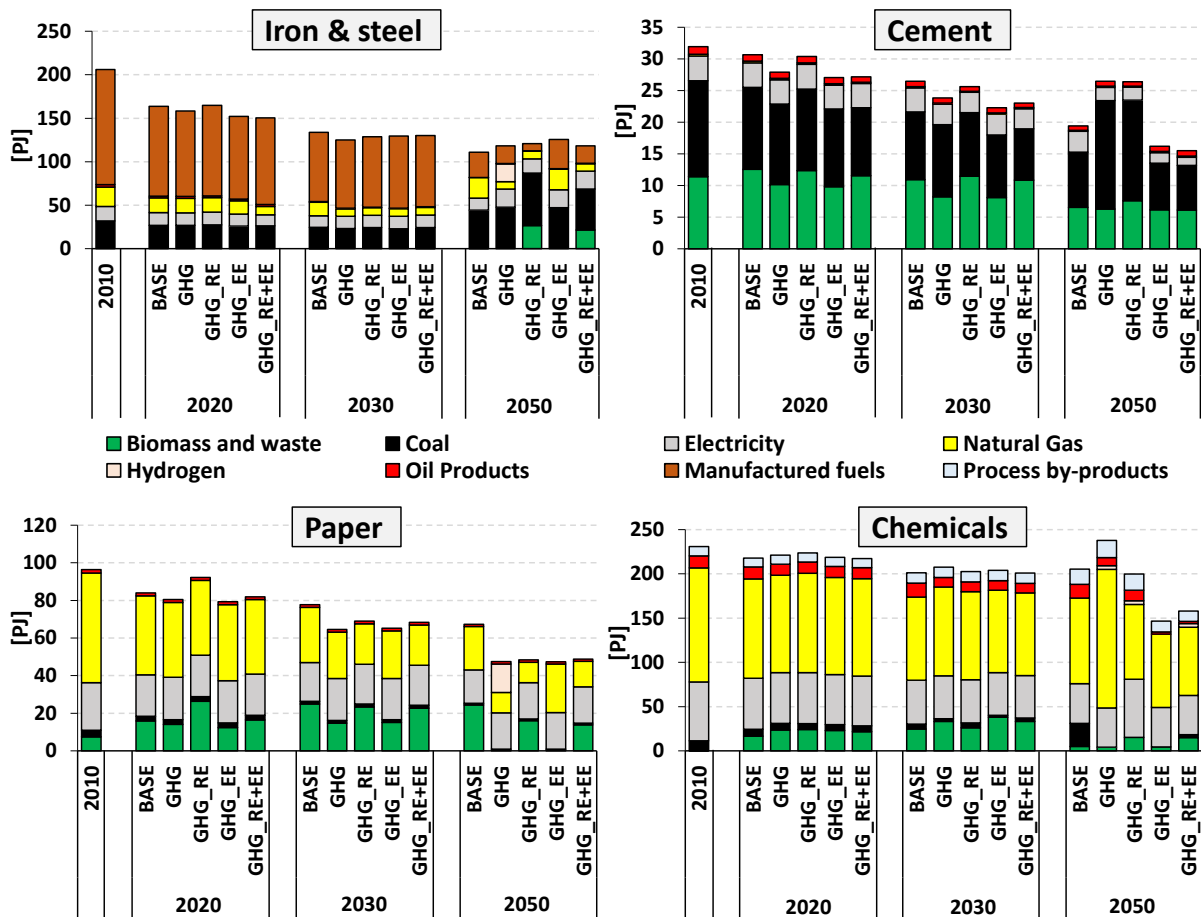

411
412 **Figure 4:** Final energy consumption in the energy-intensive industrial subsectors in UKTM

413 In the chemicals industry, the production of high value chemicals (olefins) and of ammonia are mod-
414 elled in a process-oriented manner. In both of these sectors, emission mitigation is mainly achieved
415 via CCS options if no additional requirements in terms of energy efficiency are made. Otherwise, a
416 switch to the highly efficient autothermal steam reforming in ammonia production can be observed
417 (Figure A-4). Radical process changes in steam cracking are only realized after 2040 with a limited
418 uptake of Fischer-Tropsch steam crackers in the scenarios GHG_EE and GHG_RE+EE (Figure A-5).


419 **5.3. The industry sector's contribution to emission reduction**

420 When looking at emission mitigation, the first relevant insight is that, based on the cumulative budget
421 fixed for 2028 to 2050, in none of the low-carbon scenarios are overall GHG emissions reduced by
422 80% in 2050 compared to 1990 (maximum of -74% in the scenario GHG_EE). With the cumulative
423 approach, early action is favoured such that especially between 2030 and 2040 higher emission cuts
424 are realised than a linear reduction path would imply thereby avoiding investments in additional, cost-
425 ly abatement options in 2050.

426 As expected, emission mitigation is dominated by the electricity sector where in the scenarios GHG
427 and GHG_EE even negative emissions are achieved after 2030 through the use of biomass CCS
428 plants¹¹ (Figure 5). The implementation of the renewable target increases the competition for the
429 scarce biomass resources leading to a shift to wind and (to a much smaller extent) solar energy and a

¹¹ Biomass resources are assumed to be carbon-neutral in the model following the bioenergy emission account-
ing approach of the EU Renewable Energy Directive [63].

430 slightly higher emission level in electricity generation in 2050. In relative terms (lower part of Figure
 431 5), the industry sector reaches the second highest GHG emission reduction between 2010 and 2050
 432 across sectors in those scenarios where the energy efficiency target is not implemented (up to -77%).
 433 As mentioned before, the constraint on total final energy consumption leads to a lower deployment of
 434 industrial CCS plants while at the same time emission mitigation in the residential and transport sec-
 435 tors is raised. In absolute terms (upper part of Figure 5), the industry sector takes a less prominent role
 436 with the emission reduction in 2050 of -50 Mt CO₂eq in the scenario GHG. The absolute emission
 437 reduction figures also reveal the negative emissions generated in hydrogen production through the use
 438 of biomass CCS in 2050.

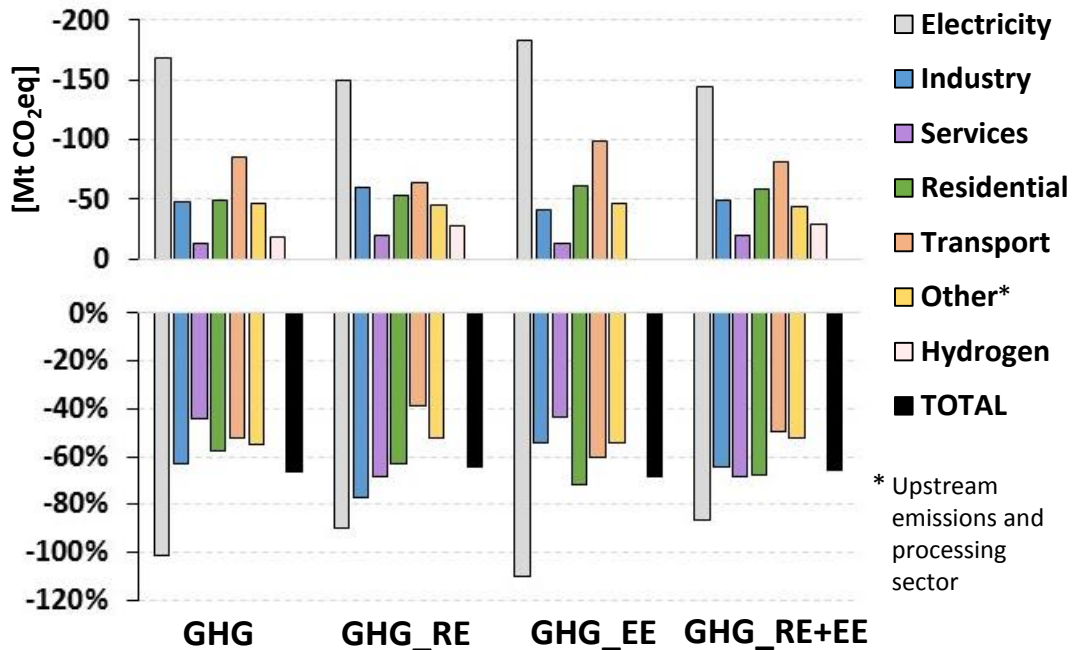

439
 440 **Figure 5:** Absolute (top) and relative (bottom) GHG emission reduction between 2010 and 2050 by sector

441 With respect to emission mitigation, the strength of the new process-oriented modelling approach can
 442 be identified in the addition of crucial mitigation options, especially to the energy-intensive subsec-
 443 tors. This increases the confidence in the actual feasibility of these mitigation pathways. Also, when
 444 comparing the results at hand with previous energy system analyses with UK MARKAL, it becomes
 445 evident that the contribution of the industry sector to decarbonisation has clearly increased [62]¹².

446 5.4. The industry sector's contribution to renewable targets

447 The EU target on the minimum share of renewable sources in gross final energy consumption can be
 448 complied with in three different ways: (1) raising the contribution of renewables to electricity genera-
 449 tion; (2) increasing the share of biofuels in the transport sector and (3) extending the direct use of bio-
 450 energy and other renewable sources for heating and cooling in the residential, services and industry
 451 sector (Table). With the new process-oriented modelling approach, additional deployment options for
 452 biomass are represented in the industry sector, most importantly kilns with biomass and waste utiliza-
 453 tion in the cement sector, steam crackers in the chemicals industry and industrial CHP plants (both for
 454 solid biomass and biogas).

¹² For scenarios with a -80% CO₂ reduction target, the analyses with UK MARKAL in [62] yielded changes in industrial final energy demand ranging from -10% to +5% and industrial CO₂ reductions ranging from 21% to 58% by 2050 compared to 2010.

455 The scenario analysis at hand shows that renewable electricity generation will play a dominant role in
 456 fulfilling the renewable target. In the scenarios GHG_RE and GHG_RE+EE a rapid increase in the
 457 renewable share in electricity production from 7.4% in 2010 to up to 73% in 2050 is realized, mainly
 458 based on onshore and offshore wind energy. Shares of intermittent sources in electricity generation of
 459 up to 66% will have substantial impacts on the electricity system. In UKTM, this is reflected in the
 460 significant amount of back-up capacity required in the scenarios with renewable target (more than
 461 50 GW of open cycle gas turbines in 2050 run at very low capacity factors).

462 In the two low-carbon scenarios without minimum renewable requirements much more reliance is put
 463 on nuclear energy. Only in the mid-term where the expansion of nuclear plants is restricted by the im-
 464 posed growth constraints, renewable sources (mainly biomass CCS) cover up to half of total electrici-
 465 ty generation in these scenarios. From 2040 onwards, hydrogen generation is one of the major con-
 466 sumers of biomass in the scenarios GHG_RE and GHG_RE+EE even though the contribution of hy-
 467 drogen to total final energy demand remains rather limited in these scenarios (4% in 2050).

468 The increased deployment of biofuels in the transport sector in 2020 in the scenarios where the re-
 469 newable target is implemented can be attributed to the sub-target for the transport sector of the EU
 470 Renewable Directive of 10% (with multiplication factors for certain biofuels [63]). Assuming that this
 471 additional transport target is discontinued after 2020, the scenario analysis shows that due to the lim-
 472 ited availability of bioenergy resources, the use of biofuels in transport is not a cost-efficient option to
 473 comply with the renewable target. However, both the renewable and the efficiency target lead to a
 474 stronger use of electricity in the transport sector at the expense of hydrogen.

475 **Table 3:** Contribution to the renewable target by sector

	2020				2030				2050			
	GHG	GHG_ RE	GHG_ EE	GHG_ RE+EE	GHG	GHG_ RE	GHG_ EE	GHG_ RE+EE	GHG	GHG_ RE	GHG_ EE	GHG_ RE+EE
RE share in electricity	15%	36%	12%	41%	53%	58%	52%	58%	19%	73%	20%	68%
RE share in hydrogen	0%	0%	5%	0%	3%	84%	6%	83%	21%	99%	7%	99%
RE share in transport	1%	7%	1%	7%	2%	6%	2%	6%	0%	0%	0%	0%
RE share in heating and cooling	4%	13%	4%	11%	7%	14%	7%	13%	30%	50%	29%	56%
<i>Industry</i>	7%	10%	7%	10%	12%	14%	13%	14%	11%	42%	10%	38%
<i>Residential</i>	1%	4%	1%	2%	2%	7%	3%	4%	43%	54%	51%	67%
<i>Services & agriculture</i>	7%	43%	7%	41%	16%	33%	10%	39%	32%	48%	8%	49%
Overall RE share	5%	15%	4%	15%	14%	20%	15%	20%	20%	50%	19%	50%
Total RE consumption [PJ]	262	839	229	843	760	1057	744	1066	1073	1934	944	2061

476

477 For heating and cooling, the share of renewable sources directly used for these services in total final
 478 energy demand of the agriculture, services, industrial and residential sectors (without electricity con-
 479 sumption) is calculated. The scenario results indicate that in the heating sector the expansion of re-
 480 newable energies is delayed when compared with electricity generation. In 2020, substantial differ-
 481 ences between the scenarios with and without the minimum renewable requirements can only be ob-
 482 served in the services and agricultural sectors, where the deployment of biomass boilers rises consid-
 483 erably. In the residential sector, a significant contribution to the renewable target is only visible after
 484 2030 with a massive roll-out of electric heat pumps. With up to 42% of total energy demand for heat-
 485 ing in 2050, the renewable share in the industrial sector is lower than in the residential and services
 486 sector. However, the industry sector is the second largest consumer of biomass (after hydrogen gener-

487 ation) in the long term. It has to be noted that under the assumed technology parameters, the use of
488 biomass in industrial CHP plants remains comparatively limited, competing with centralized biomass
489 CCS plants in hydrogen and electricity generation.

490 Comparing the overall renewable shares between the scenarios with and without minimum require-
491 ments for renewable sources (50% vs. 20% in 2050) shows that under the chosen scenario assump-
492 tions, an ambitious expansion of renewable energy in the UK is not the most cost-efficient mitigation
493 option.


494 **5.5. The industry sector's contribution to energy efficiency**

495 In UKTM, energy savings can be achieved through the deployment of more efficient technologies as
496 well as fuel substitution. In addition, endogenous energy service demand reductions due to changes in
497 the prices for these services are taken into account by applying own-price elasticities to the various
498 demand commodities. In the energy-intensive industry sectors, a large variety of both replacement
499 technologies with higher efficiency and improvements to existing production routes (e.g. the use of
500 waste heat) are taken into account with the new modelling approach, while in the less energy-
501 intensive sectors efficiency can mainly be improved through the use of high efficiency boilers.

502 In the base case, total final energy consumption remains at about today's level over the observed peri-
503 od (Figure 6). Industry is the only sector whose energy consumption drops considerably until 2050
504 without the implementation of emission targets. Strong increases in energy demand occur especially
505 in the transport sector. When the long-term GHG reduction target for the UK is taken into considera-
506 tion (scenario GHG), increasing energy efficiency is one of the main abatement strategies with a de-
507 cline in final energy demand of 23% until 2050. While, as mentioned before, no further reductions
508 compared to the base case are realized in the industry sector, significant efforts are undertaken in the
509 residential sector through the uptake of conservation measures as well as a trend to electrification. In
510 the transport sector, which exhibits the highest reduction rate between 2010 and 2050, efficiency is
511 initially increased by the use of hybrid electric vehicles which after 2030 are partly replaced by elec-
512 tric (mainly cars and light-duty transport) and hydrogen (mainly heavy-duty transport) vehicles. The
513 lowering effect of conservation measures applied in the services sector is, in the long term, more than
514 offset by the sector's rising energy services demand caused by a still growing share in gross value
515 added and the associated increase in commercial floor space.

516 The results for the scenario GHG_RE show that a simultaneous increase in energy efficiency is used
517 as one strategy to comply with the renewable target in the long-term. Especially in the transport sector
518 additional reductions in final energy demand are achieved through a stronger electrification.

519 When introducing the additional target on energy efficiency, additional energy savings compared to
520 the scenario GHG can be observed for all end-use sectors and involve the installation of more effi-
521 cient technologies, a higher rate of electrification as well as a switch from biomass to highly efficient
522 natural gas boilers. In comparison to the baseline, the strongest changes occur in the transport sector,
523 while in the industry sector the reduction in final energy demand between 2010 and 2050 is only
524 raised from -24% in the base case to up to -31% in the scenario GHG_EE. Hence, the decline of in-
525 dustrial energy demand plays a crucial role in reaching long-term energy efficiency targets, but most
526 of these reductions are already realized in the absence of any policy targets.

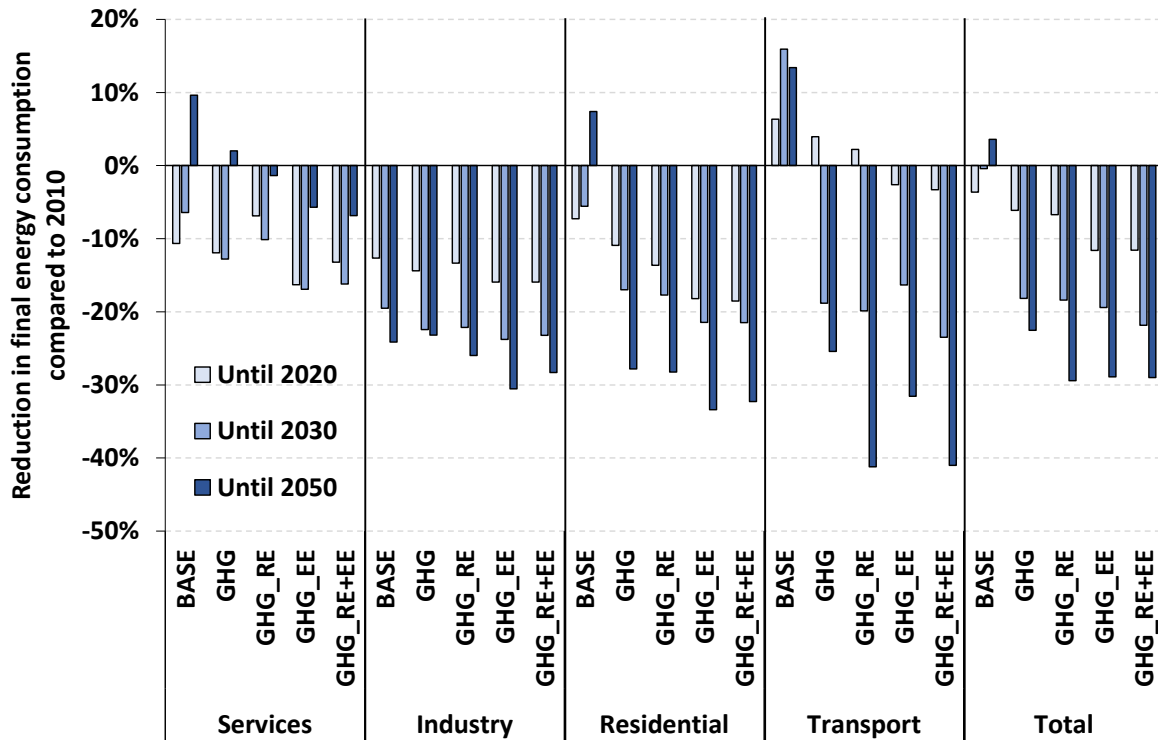

527
528


Figure 6: Change in final energy consumption by sector compared to 2010

529 **5.6. Overlapping policy cost impacts**

530 Apart from technology deployment and fuel use, the UKTM results also allow a comparison of the
531 different scenarios in terms of implications on costs. For each scenario, the least-cost pathway for the
532 long-term development of the UK energy system under the given assumptions is calculated. With the
533 representation of actual technology options and their associated cost parameters in the industry sector,
534 greater reliability of the contribution of the industry sector to overall system costs has been achieved
535 with the new modelling approach.

536 First, the scenarios are contrasted in terms of the carbon price which is given in the model as the
537 shadow price of the carbon constraint (Figure 7). In the scenario GHG, a first strong increase in the
538 price on GHG emissions to over 100 £/t CO₂eq occurs with the implementation of the 4th Carbon
539 Budget (2023-2027). Afterwards, the formulation of the -80% target as a cumulative emission budget
540 covering the period from 2028 to 2050 results in a smoothly increasing carbon price reaching slightly
541 above 400 £/t CO₂eq in 2050. It has to be pointed out that the carbon price would be significantly
542 higher in 2050 if a linear reduction pathway forcing the model to a -80% reduction in 2050 was im-
543 plemented.

544 In the scenarios which take the European policy targets into account, the price of carbon is, until
545 2030, mainly determined by the exogenously set ETS and non-ETS prices. After 2020 the same cu-
546 mulative target is assumed as in the scenario GHG. It clearly shows that both the renewable and the
547 energy efficiency target have a dampening effect on the carbon price signal. In 2050, the price for
548 GHG emissions ranges between 200 (GHG_RE+EE) and 260 (GHG_RE) £/t CO₂eq. This does not
549 imply that the mitigation targets are reached in a less costly way in these scenarios as the shadow
550 prices on the renewable and efficiency constraints also need to be taken into consideration, which
551 reach up to 58 £/GJ of renewable energy used and up to 84 £/GJ of final energy demand reduced.

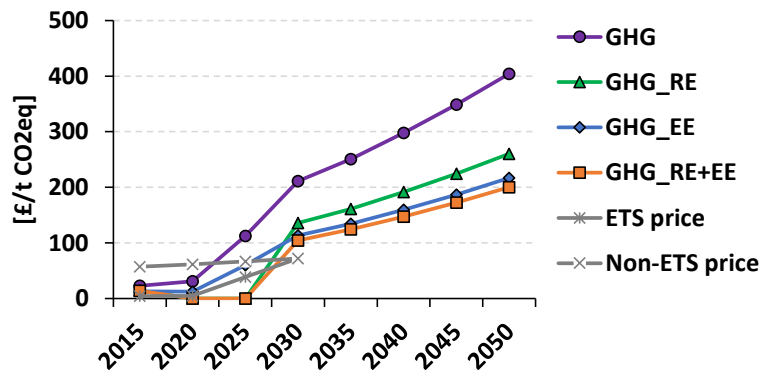

552
553 **Figure 7:** Carbon prices in the scenario analysis

554 In order to assess the additional system-wide cost burden that is caused by the implementation of the
555 different climate and energy policy targets in a consistent manner a look is taken at total societal wel-
556 fare costs. These are defined as the net total surplus of producers and consumers and comprise the
557 entire costs of a specific energy system in a certain region and a certain period, covering capital costs
558 for energy conversion and transport technologies, fixed operating and maintenance costs as well as
559 fuel and certificate costs.

560 The cost burden resulting from the transition to a low-carbon energy system in the UK increases
561 steadily over the projected period with a difference in total annual undiscounted welfare costs of 6%
562 in 2020 and of 11% in 2050 between the scenario GHG and the base case (Table). In absolute terms,
563 the difference amounts to more than £1300 billion (in real terms) when cumulated over the period
564 from 2010 and 2050. The results also highlight that putting additional constraints on the energy sys-
565 tem in terms of minimum requirements for renewable energy or energy efficiency increases the cost
566 reflected in a cumulated cost difference to the scenario GHG of £540 billion for GHG_RE and of
567 £322 billion for GHG_EE over the period 2010 to 2050. The fact that this cost difference decreases
568 over time indicates that especially in the mid-term the current EU target levels have a strong influence
569 on the chosen mitigation options associated with substantial additional costs for the energy system.

570 **Table 4:** Comparison of annual undiscounted welfare cost

		2020	2030	2050	Cumulated 2010-2050 [Bn £]
GHG	vs. BASE	6.0%	7.4%	11.0%	1356
GHG_RE	vs. BASE	9.5%	10.5%	13.1%	1896
	vs. GHG	3.3%	2.9%	1.9%	540
GHG_EE	vs. BASE	8.9%	10.2%	10.9%	1677
	vs. GHG	2.8%	2.6%	-0.1%	322
GHG_RE+EE	vs. BASE	9.6%	10.7%	13.2%	1911
	vs. GHG	3.4%	3.1%	2.0%	555

571

572 **6. Conclusions and Policy Implications**

573 This paper has introduced a new methodological approach for a more detailed representation of the
574 industrial sector based on an integration of bottom-up process level database, but still contained with-
575 in a whole energy system modelling framework. Presented here for a case study of the UK, this meth-
576 odology could be easily transferred to other national settings.

577 The subsequent quantitative scenario analysis of the UK energy system has shown how this process-
578 oriented representation of the industry sector in an energy system analysis can help to evaluate the
579 contribution of this sector to long-term climate and energy policy targets. The scenario results indicate
580 that the UK's industry sector will have to play a key part in the decarbonisation process, both in terms
581 of its use of low-carbon upstream vectors and in process mitigation options within the subsectors. The
582 industry sector will also be a major contributor to achieving the energy efficiency target, while it plays
583 a slightly less prominent role in the expansion of renewable energies, which is mainly limited to the
584 use of biomass for low-temperature heating services. Ambitious renewable targets will most strongly
585 affect electricity generation where high shares of intermittent sources will have substantial effects on
586 the electricity system in terms of back-up and storage capacity, grid reinforcement and expansion as
587 well as demand-side management. Such system effects are not fully reflected in the scenario analysis
588 with UKTM.

589 The scenario analysis also highlights that the implementation of additional policy targets apart from
590 emission mitigation, as it is being done in the European Union in the case of renewable source and
591 energy efficiency, needs to be examined critically. Such additional targets can distort the cost efficient
592 strategy of reaching the desired emission reductions and lead to additional cost burdens for consum-
593 ers. Setting additional sub-targets and implementing technology- or sector-specific policy instruments
594 might be justified from a second-best perspective where not all environmental externalities from cli-
595 mate change are yet internalized and substantial uncertainty about future carbon price signals exists
596 ([64] & [54]). Moreover, other political motivations for the promotion of renewable sources and ener-
597 gy efficiency need to be taken into account, as for example a reduction of import dependency, allevia-
598 tion of fuel poverty or technology promotion in order to realize learning effects. Yet, even if these
599 additional target dimensions can be justified, it is essential to take the interactions between them into
600 account.

601 With respect to the modelling approach, further methodological work will be needed to improve the
602 representation of the less energy-intensive industrial subsectors in bottom-up energy system models.
603 The fact that also from these industry sectors substantial mitigation efforts will be required highlights
604 that targeted policy engagement with these highly heterogeneous sectors, often dominated by small-
605 and medium-sized companies, will be required. In addition, the significant uncertainties in the cost
606 and efficiency assumptions of future industrial technology options, which often constitute radical pro-
607 cess changes, need to be addressed thoroughly. However, the methodological advance presented in
608 this paper has shown how a process-oriented representation of the industry sector based on a compre-
609 hensive technology database can provide a more detailed and consistent picture of the sector's role in
610 long-term energy and climate policy targets within the scope of a whole energy system analysis.

611

612 **Acknowledgement**

613 This research was supported under the Whole Systems Energy Modelling Consortium (WholeSEM) –
614 Ref: EP/K039326/1.

615 References

- 616 [1] IPCC, 2014: Summary for Policymakers. In: *Climate Change 2014: Mitigation of Climate*
617 *Change. Contribution of Working Group III to the Fifth Assessment Report of the Intergovern-*
618 *mental Panel on Climate Change* [Edenhofer, O., R. Pichs-Madruga, Y. Sokona, E. Farahani,
619 S. Kadner, K. Seyboth, A. Adler, I. Baum, S. Brunner, P. Eickemeier, B. Kriemann, J. Savo-
620 lainen, S. Schlömer, C. von Stechow, T. Zwickel and J.C. Minx (eds.)]. Cambridge University
621 Press, Cambridge, United Kingdom and New York, NY, USA.
- 622 [2] Jaccard, M., Agbenmabiese, L., Azar, C., de Oliveira, A., Fischer, C., Fisher, B., ... Zhang, X.
623 (2012). Chapter 22 - Policies for Energy System Transformations: Objectives and Instruments.
624 In: *Global Energy Assessment - Toward a Sustainable Future* (pp. 1549-1602). Cambridge
625 University Press, Cambridge, UK and New York, NY, USA and the International Institute for
626 Applied Systems Analysis, Laxenburg, Austria.
- 627 [3] DECC (2011). *The Carbon Plan: Delivering our low carbon future*. London: Department of
628 Energy and Climate Change.
- 629 [4] CCC (2013). Fourth Carbon Budget Review – part 2, The cost-effective path to the 2050 target.
630 London: Committee on Climate Change.
- 631 [5] Grubb, M. (2014). Planetary Economics: Energy, Climate Change and the Three Domains of
632 Sustainable Development. London, UK, Routledge.
- 633 [6] Napp, T.A., Gambhir, A., Hills, T.P., Florin, N., Fennell, P.S. (2014). A review of the technol-
634 ogies, economics and policy instruments for decarbonising energy-intensive manufactur-
635 ing industries. *Renewable and sustainable energy reviews*, 30, 616 – 640. doi:
636 <http://dx.doi.org/10.1016/j.rser.2013.10.036>
- 637 [7] Fishedick M., J. Roy, A. Abdel-Aziz, A. Acquaye, J. M. Allwood, J.-P. Ceron, Y. Geng, H.
638 Kheshgi, A. Lanza, D. Perczyk, L. Price, E. Santalla, C. Sheinbaum, and K. Tanaka, 2014: In-
639 dustry. In: *Climate Change 2014: Mitigation of Climate Change. Contribution of Working*
640 *Group III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*
641 [Edenhofer, O., R. Pichs-Madruga, Y. Sokona, E. Farahani, S. Kadner, K. Seyboth, A. Adler, I.
642 Baum, S. Brunner, P. Eickemeier, B. Kriemann, J. Savolainen, S. Schlömer, C. von Stechow, T.
643 Zwickel and J.C. Minx (eds.)]. Cambridge University Press, Cambridge, United Kingdom and
644 New York, NY, USA.
- 645 [8] Parsons Brinckerhoff and DNV GL (2015). Industrial Decarbonisation & Energy Efficiency
646 Roadmaps to 2050, Cross-sector Summary. Report for the Department of Energy and Climate
647 Change and the Department for Business, Innovation and Skills.
- 648 [9] European Commission (EC) (2008). *Communication from the Commission to the European*
649 *Parliament, the Council, the European Economic and Social Committee and the Committee of*
650 *the Regions - 20 20 by 2020 - Europe's climate change opportunity {COM(2008) 30 final}*.
651 Brussels: European Commission (EC).
- 652 [10] European Commission (EC) (2014). *Communication from the Commission to the European*
653 *Parliament, the Council, the European Economic and Social Committee and the Committee of*
654 *the Regions: A policy framework for climate and energy in the period from 2020 to 2030*
655 *{COM(2014) 15 final}*. Brussels: European Commission (EC).
- 656 [11] Karali, N., Xu, T., & Sathaye, J. (2012). *Industrial Sector Energy Efficiency Modeling (ISEEM)*
657 *Framework Documentation*. LBNL Final Report. Berkeley: Lawrence Berkeley National
658 Laboratory.
- 659 [12] Kannan, R., & Strachan, N. (2009). Modelling the UK residential energy sector under long-
660 term decarbonisation scenarios: Comparison between energy systems and sectoral modelling
661 approaches. *Applied Energy*, 86(4), 416-428. doi: [http://dx.doi.org/10.1016/j.apenergy.2008.08.](http://dx.doi.org/10.1016/j.apenergy.2008.08.005)
662 [005](http://dx.doi.org/10.1016/j.apenergy.2008.08.005)

- 663 [13] Swan, L. G., & Ugursal, V. I. (2009). Modeling of end-use energy consumption in the residen-
664 tial sector: A review of modeling techniques. *Renewable and Sustainable Energy Reviews*,
665 13(8), 1819-1835. doi: <http://dx.doi.org/10.1016/j.rser.2008.09.033>
- 666 [14] Wilkerson, J. T., Cullenward, D., Davidian, D., & Weyant, J. P. (2013). End use technology
667 choice in the National Energy Modeling System (NEMS): An analysis of the residential and
668 commercial building sectors. *Energy Economics*, 40(0), 773-784. doi:
669 <http://dx.doi.org/10.1016/j.eneco.2013.09.023>
- 670 [15] Dodds, P. E., & McDowall, W. (2014). Methodologies for representing the road transport sec-
671 tor in energy system models. *International Journal of Hydrogen Energy*, 39(5), 2345-2358. doi:
672 <http://dx.doi.org/10.1016/j.ijhydene.2013.11.021>
- 673 [16] Daly, H. E., Ramea, K., Chiodi, A., Yeh, S., Gargiulo, M., & Gallachóir, B. Ó. (2014). Incorpor-
674 ating travel behaviour and travel time into TIMES energy system models. *Applied Energy*,
675 135(0), 429-439. doi: <http://dx.doi.org/10.1016/j.apenergy.2014.08.051>
- 676 [17] Anable, J., Brand, C., Tran, M., & Eyre, N. (2012). Modelling transport energy demand: A so-
677 cio-technical approach. *Energy Policy*, 41(0), 125-138. doi:
678 <http://dx.doi.org/10.1016/j.enpol.2010.08.020>
- 679 [18] Fleiter, T., Fehrenbach, D., Worrell, E., & Eichhammer, W. (2012). Energy efficiency in the
680 German pulp and paper industry – A model-based assessment of saving potentials. *Energy*,
681 40(1), 84-99. doi: 10.1016/j.energy.2012.02.025
- 682 [19] Hasanbeigi, A., Morrow, W., Masanet, E., Sathaye, J., & Xu, T. (2013). Energy efficiency im-
683 provement and CO2 emission reduction opportunities in the cement industry in China. *Energy*
684 *Policy*, 57, 287-297. doi: 10.1016/j.enpol.2013.01.053
- 685 [20] Pardo, N., & Moya, J. A. (2013). Prospective scenarios on energy efficiency and CO₂ emissions
686 in the European Iron & Steel industry. *Energy*, 54, 113-128. doi: 10.1016/j.energy.2013.03.015
- 687 [21] Porzio, G. F., Fornai, B., Amato, A., Matarese, N., Vannucci, M., Chiappelli, L., & Colla, V.
688 (2013). Reducing the energy consumption and CO₂ emissions of energy intensive industries
689 through decision support systems – An example of application to the steel industry. *Applied*
690 *Energy*, 112, 818-833. doi: 10.1016/j.apenergy.2013.05.005
- 691 [22] Broeren, M. L. M., Saygin, D., & Patel, M. K. (2014). Forecasting global developments in the
692 basic chemical industry for environmental policy analysis. *Energy Policy*, 64, 273-287. doi:
693 10.1016/j.enpol.2013.09.025
- 694 [23] Brunke, J.-C., & Blesl, M. (2014). A plant-specific bottom-up approach for assessing the cost-
695 effective energy conservation potential and its ability to compensate rising energy-related costs
696 in the German iron and steel industry. *Energy Policy*, 67, 431-446. doi:
697 10.1016/j.enpol.2013.12.024
- 698 [24] Karali, N., Xu, T., & Sathaye, J. (2014). Reducing energy consumption and CO₂ emissions by
699 energy efficiency measures and international trading: A bottom-up modeling for the U.S. iron
700 and steel sector. *Applied Energy*, 120, 133-146. doi: 10.1016/j.apenergy.2014.01.055
- 701 [25] Kannan, R., Strachan, N., Pye, S. Anandarajah, G., & Balta-Ozkan, N. (2007). UK MARKAL
702 Model Documentation. Retrieved from the UCL Energy Institute Models website:
703 www.ucl.ac.uk/energy-models/models/uk-markal
- 704 [26] Loulou, R., & Labriet, M. (2008). ETSAP-TIAM: the TIMES integrated assessment model Part
705 I: Model structure. *Computational Management Science*, 5(1-2), 7-40. doi: 10.1007/s10287-
706 007-0046-z
- 707 [27] E3MLab (2014). PRIMES Model 2013-2014, Detailed model description. Retrieved from the
708 E3MLab / ICCS website, National Technical University of Athens:
709 [www.e3mlab.ntua.gr/e3mlab/PRIMES%20Manual/The%20PRIMES%20MODEL%202013-
710 2014.pdf](http://www.e3mlab.ntua.gr/e3mlab/PRIMES%20Manual/The%20PRIMES%20MODEL%202013-2014.pdf)


- 711 [28] U.S. Energy Information Administration (EIA) (2013). Model Documentation Report: Industrial Demand Module of the National Energy Modeling System. Retrieved from the EIA website:
712 www.eia.gov/forecasts/aeo/nems/documentation/industrial/pdf/m064%282013%29.pdf
713
- 714 [29] International Energy Agency (IEA) (2014). Energy Technology Perspectives 2014 - Harnessing
715 Electricity's Potential. Paris: Organisation for Economic Co-operation and Development
716 (OECD) / International Energy Agency (IEA).
- 717 [30] Simoes, S., Nijs, W., Ruiz, P., Sgobbi, A., Radu, D., Bolat, P., Thiel, Ch., & Peteves, S. (2013).
718 The JRC-EU-TIMES model. JRC Scientific and Policy Reports. Petten: European Commission
719 Joint Research Centre. doi: 10.2790/97596
- 720 [31] Wiedmann, T. (2009). A review of recent multi-region input–output models used for consump-
721 tion-based emission and resource accounting. *Ecological Economics*, 69(2), 211-222. doi:
722 http://dx.doi.org/10.1016/j.ecolecon.2009.08.026
- 723 [32] Tukker, A., & Dietzenbacher, E. (2013). Global Multiregional Input-Output Frameworks: an
724 Introduction and Outlook. *Economic Systems Research*, 25(1), 1-19. doi:
725 10.1080/09535314.2012.761179
- 726 [33] Barrett, J., Peters, G., Wiedmann, T., Scott, K., Lenzen, M., Roelich, K., & Le Quéré, C.
727 (2013). Consumption-based GHG emission accounting: a UK case study. *Climate Policy*,
728 13(4), 451-470. doi: 10.1080/14693062.2013.788858
- 729 [34] Böhringer, C., Balistreri, E. J., & Rutherford, T. F. (2012). The role of border carbon adjust-
730 ment in unilateral climate policy: Overview of an Energy Modeling Forum study (EMF 29).
731 *Energy Economics*, 34, Supplement 2(0), S97-S110. doi:
732 http://dx.doi.org/10.1016/j.eneco.2012.10.003
- 733 [35] Guo, Z., Zhang, X., Zheng, Y., & Rao, R. (2014). Exploring the impacts of a carbon tax on the
734 Chinese economy using a CGE model with a detailed disaggregation of energy sectors. *Energy*
735 *Economics*, 45(0), 455-462. doi: http://dx.doi.org/10.1016/j.eneco.2014.08.016
- 736 [36] Fujimori, S., Kainuma, M., Masui, T., Hasegawa, T., & Dai, H. (2014). The effectiveness of
737 energy service demand reduction: A scenario analysis of global climate change mitigation. *En-*
738 *ergy Policy*, 75(0), 379-391. doi: http://dx.doi.org/10.1016/j.enpol.2014.09.015
- 739 [37] Loulou, R., Remme, U., Lehtilä, A., Kanudia, A., & Goldstein, G. (2005). Documentation for
740 the TIMES model. Retrieved from the Energy Technology Systems Analysis Program (ETSAP)
741 website: http://www.iea-etsap.org/web/Documentation.asp
- 742 [38] Ekins, P., Anandarajah, G., & Strachan, N. (2011). Towards a low-carbon economy: scenarios
743 and policies for the UK. *Climate Policy*, 11(2), 865-882. doi: 10.3763/cpol.2010.0126
- 744 [39] DTI (2007). Energy White Paper: Meeting the Energy Challenge. London: Department of
745 Trade and Industry.
- 746 [40] CCC (2008). *Building a low-carbon economy – the UK's contribution to tackling climate*
747 *change*. London: Committee on Climate Change.
- 748 [41] Daly, H. E., Scott, K., Strachan, N., & Barrett, J. R. (2015). The indirect CO₂ emission implica-
749 tions of energy system pathways: Linking IO and TIMES models for the UK. *Environmental*
750 *Science & Technology*. doi: 10.1021/acs.est.5b01020
- 751 [42] Dodds, P., Daly, H., & Fais, B. (2014). Benefits of incorporating non-energy and non-CO₂ pro-
752 cesses into energy systems models. Conference paper for the 14th IAEE European Energy Con-
753 ference, Rome, 28-31 October 2014.
- 754 [43] Daly, H. E., Dodds, P. E., & Fais, B. (2015). UK TIMES Model Documentation, version 1.0.
755 London: UCL Energy Institute. (Forthcoming)
- 756 [44] Griffin, P., Hammond, G., & Norman, J. (2013). Industrial Energy Use from a Bottom-Up Per-
757 spective: Developing the Usable Energy Database (Beta version). UK Energy Research Centre

- 758 (UKERC/WP/ED/2013/002). Retrieved from the UKERC website: [http://data.ukedc.rl.ac.uk/](http://data.ukedc.rl.ac.uk/browse/edc/EnergyConsumption/Industry/UED_Documentation.pdf)
759 [browse/edc/EnergyConsumption/Industry/UED_Documentation.pdf](http://data.ukedc.rl.ac.uk/browse/edc/EnergyConsumption/Industry/UED_Documentation.pdf)
- 760 [45] DECC (2012). *Energy Consumption in the UK (2012) Statistics*. London: Department of Ener-
761 gy and Climate Change.
- 762 [46] OBR (2012). *Fiscal sustainability report, July 2012*. London: Office for Budget Responsibility.
- 763 [47] ONS (2011). *National Population Projections, 2010-based*. Newport: Office for National Sta-
764 tistics.
- 765 [48] Anandarajah, G., Pye, S., Usher, W., Kesicki, F., & McGlade, Ch. (2011). TIAM-UCL Global
766 Model Documentation. UK Energy Research Centre Working Paper
767 (UKERC/WP/ESY/2011/001). Retrieved from the UCL Energy Institute Models website:
768 <http://www.ucl.ac.uk/energy-models/models/tiam-ucl/tiam-ucl-manual>
- 769 [49] CCC (2011). *Bioenergy Review*. London: Committee on Climate Change.
- 770 [50] HM Treasury (2011). *The Green Book*. London: HM Treasury.
- 771 [51] Strachan, N., & Usher, W. (2010). UK MARKAL Modelling – Examining Decarbonisation
772 Pathways in the 2020s on the Way to Meeting the 2050 Emissions Target (Final Report for the
773 Committee on Climate Change). Retrieved from the UCL Energy Institute website:
774 [http://www.ucl.ac.uk/energy-models/models/uk-markal/ccf-fourth-carbon-budget-final-report-](http://www.ucl.ac.uk/energy-models/models/uk-markal/ccf-fourth-carbon-budget-final-report-uk-markal-updates)
775 [uk-markal-updates](http://www.ucl.ac.uk/energy-models/models/uk-markal/ccf-fourth-carbon-budget-final-report-uk-markal-updates)
- 776 [52] CCC (2011). Time preference, costs of capital and hidden costs: a Committee on Climate
777 Change Note. Retrieved from the CCC website: [http://archive.theccc.org.uk](http://archive.theccc.org.uk/aws/Time%20prefernce,%20costs%20of%20capital%20and%20hiddencosts.pdf)
778 [/aws/Time%20prefernce,%20costs%20of%20capital%20and%20hiddencosts.pdf](http://archive.theccc.org.uk/aws/Time%20prefernce,%20costs%20of%20capital%20and%20hiddencosts.pdf)
- 779 [53] Pye, S., Usher, W., & Strachan, N. (2014). The uncertain but critical role of demand reduction
780 in meeting long-term energy decarbonisation targets. *Energy Policy*, 73, 575–586. doi:
781 10.1016/j.enpol.2014.05.025
- 782 [54] Benneer, L., & Stavins, R. (2007). Second-best theory and the use of multiple policy instru-
783 ments. *Environmental and Resource Economics*, 37(1), 111-129. doi: 10.1007/s10640-007-
784 9110-y
- 785 [55] Fais, B., Blesl, M., Fahl, U., & Voß, A. (2014). Analysing the interaction between emission
786 trading and renewable electricity support in TIMES. *Climate Policy*. doi:
787 10.1080/14693062.2014.927749
- 788 [56] Anandarajah, G., & Strachan, N. (2010). Interactions and implications of renewable and climate
789 change policy on UK energy scenarios. *Energy Policy*, 38(11), 6724-6735. doi:
790 10.1016/j.enpol.2010.06.042
- 791 [57] European Commission (EC) (2009). *Decision No 406/2009/EC of the European Parliament*
792 *and of the Council of 23 April 2009 on the effort of Member States to reduce their greenhouse*
793 *gas emissions to meet the Community's greenhouse gas emission reduction commitments up to*
794 *2020*. Brussels: European Commission (EC).
- 795 [58] DECC (2014). Green Book supplementary guidance: valuation of energy use and greenhouse
796 gas emissions for appraisal. Retrieved from the GOV.UK website:
797 [https://www.gov.uk/government/publications/valuation-of-energy-use-and-greenhouse-gas-](https://www.gov.uk/government/publications/valuation-of-energy-use-and-greenhouse-gas-emissions-for-appraisal)
798 [emissions-for-appraisal](https://www.gov.uk/government/publications/valuation-of-energy-use-and-greenhouse-gas-emissions-for-appraisal)
- 799 [59] DECC (2009). National Renewable Energy Action Plan for the United Kingdom. Retrieved
800 from the GOV.UK website: [https://www.gov.uk/government/uploads/system/uploads/attach-](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/47871/25-nat-ren-energy-action-plan.pdf)
801 [ment_data/file/47871/25-nat-ren-energy-action-plan.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/47871/25-nat-ren-energy-action-plan.pdf)
- 802 [60] DECC (2014). *UK National Energy Efficiency Action Plan*. London: Department of Energy
803 and Climate Change.
- 804 [61] European Commission (EC) (2011). *Commission Staff Working Document: Impact Assessment*
805 *Accompanying document to the Communication from the Commission to the European Parlia-*

- 806 *ment, the Council, the European Economic and Social Committee and the Committee of the Re-*
807 *gions: A Roadmap for moving to a competitive low carbon economy in 2050 {COM(2011) 112*
808 *final} {SEC(2011) 289 final}*. Brussels: European Commission (EC).
- 809 [62] Anandarajah, G., Strachan, N., Ekins, P., Kannan, R., & Hughes, N. (2009). Pathways to a
810 Low Carbon Economy: Energy systems modelling. UKERC Energy 2050 Research Report 1,
811 London.
- 812 [63] European Commission (EC) (2009). *Directive 2009/28/EC of the European Parliament and of*
813 *the Council of 23 April 2009 on the promotion of the use of energy from renewable sources and*
814 *amending and subsequently repealing Directives 2001/77/EC and 2003/30/EC*. Brussels: Euro-
815 pean Commission (EC).
- 816 [64] Fischer, C., & Newell, R. G. (2008). Environmental and technology policies for climate mitiga-
817 tion. *Journal of Environmental Economics and Management*, 55(2), 142-162. doi:
818 <http://dx.doi.org/10.1016/j.jeem.2007.11.001>
- 819 [65] DECC (2014). Updated energy and emissions projections 2014. Retrieved from the GOV.UK
820 website: [https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/368021/](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/368021/Updated_energy_and_emissions_projections2014.pdf)
821 [Updated_energy_and_emissions_projections2014.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/368021/Updated_energy_and_emissions_projections2014.pdf)
- 822 [66] Pfenninger, S., & Keirstead, J. (2015). Renewables, nuclear, or fossil fuels? Scenarios for Great
823 Britain's power system considering costs, emissions and energy security. *Applied Energy*, 152,
824 83-93. doi: <http://dx.doi.org/10.1016/j.apenergy.2015.04.102>
- 825 [67] CCC (2011). *The Renewable Energy Review*. London: Committee on Climate Change.
- 826 [68] European Climate Foundation (2010). Roadmap 2050: A practical guide to a prosperous, low-
827 carbon Europe. Retrieved from the roadmap2050 website: [http://www.roadmap2050.eu/ at-](http://www.roadmap2050.eu/attachments/files/Volume1_fullreport_PressPack.pdf)
828 [tachments/files/Volume1_fullreport_PressPack.pdf](http://www.roadmap2050.eu/attachments/files/Volume1_fullreport_PressPack.pdf)
- 829


830 **Annex – Technology evolution in the energy-intensive sectors**

831 The figures below provide additional information on the technology deployment in the energy-
 832 intensive sectors modelled in a process-oriented manner in UKTM. Note that usually only the tech-
 833 nology choices for the most important production steps are shown. Also, only the technologies that
 834 are chosen are displayed in the figures (and not all that are actually modelled in UKTM).

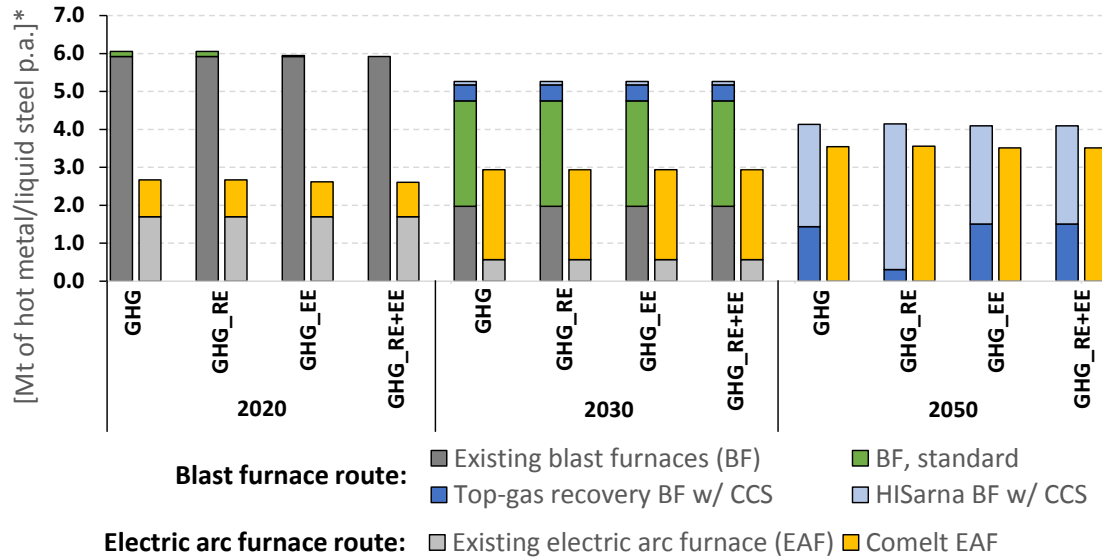


* For the BF route, only the technologies for the production of hot metal in BF is shown (which is then processed to liquid steel in basic oxygen furnaces); for the EAF route the production of liquid steel is shown.

835 **Figure A-1:** Technology evolution in the iron and steel sector (blast and electric arc furnaces) in the low-
 836 carbon scenarios
 837

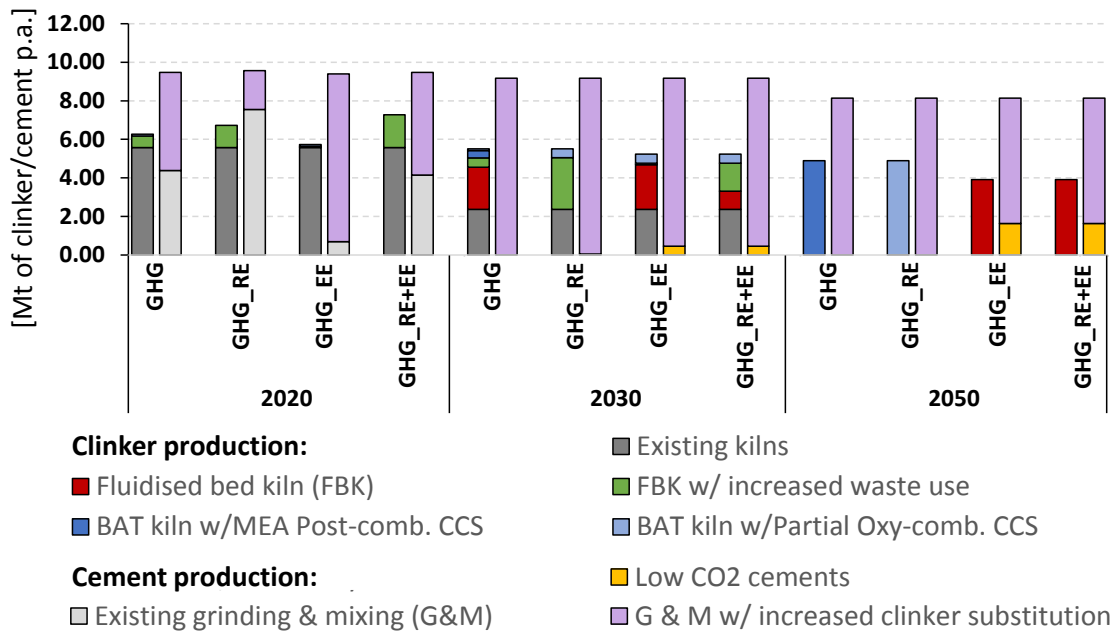

838 **Figure A-2:** Technology evolution in the cement sector in the low-carbon scenarios
 839

840

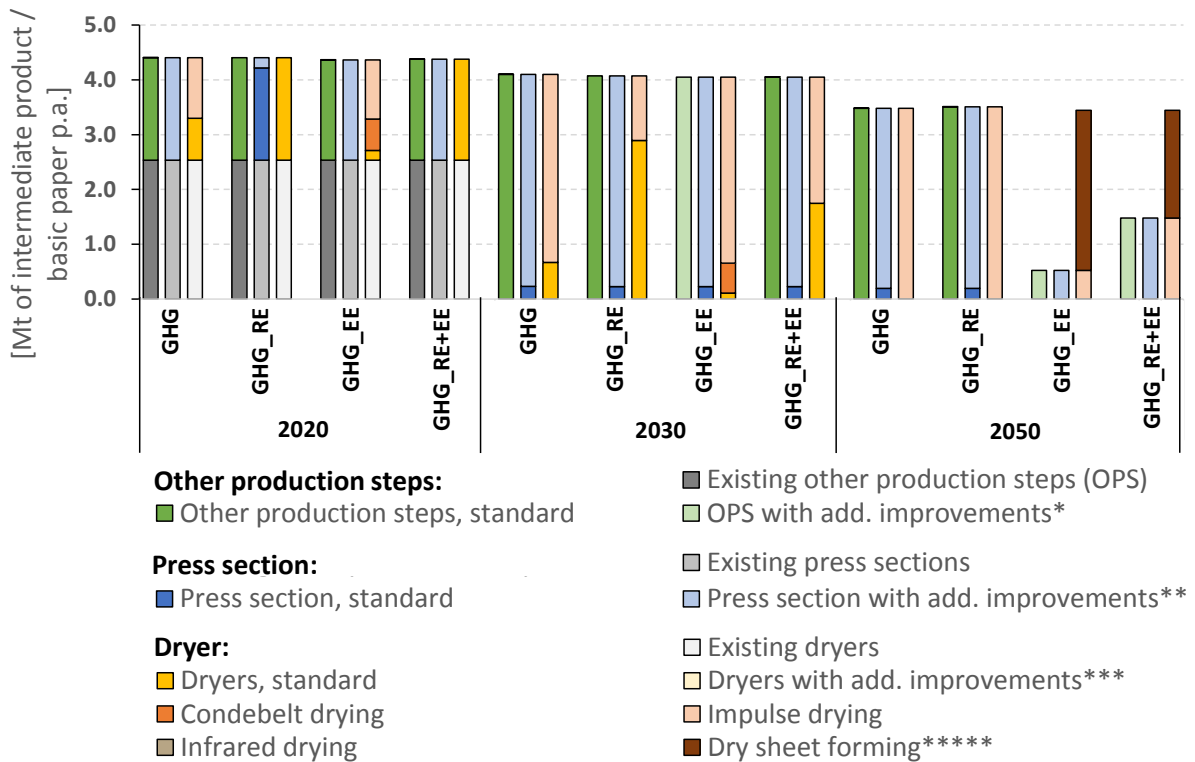

* Additional improvements (=add-ons improving existing technologies) for OPS modelled in UKTM are: (1) Online moisture management; (2) Other (covering average of using fans or blowers instead of vacuum where applicable, using turbo-compressors in place of vacuums in given situations; pumps and motors: match pumping capacity, aim for continuous flows, better control of flows).


** Additional improvements for press section modelled in UKTM are: (1) Aggregate (covering average of felt and belt design optimisation, monitoring press performance, turning off/reducing steam flow when not required, shoe pressing, minimising rewet, checking nip profiles & optimising crowns, steam boxes use).

*** Additional improvements for dryer modelled in UKTM are: (1) Hot press; (2) Reducing air infiltration; (3) Maximizing hood humidity; (4) Efficiently using flash steam; (5) Maximizing heat recovery; (6) Other (average of avoiding steam venting, optimising pressures, felt design to optimise sheet contact, auto warm-up, using low pressure steam in place of high pressure, maximising condensate return, optimised dryer technology).

**** Alternative production route, covers all steps of basic paper production (OPS, press section & dryer)


841
842

Figure A-3: Technology evolution in the paper sector (basic paper production) in the low-carbon scenarios

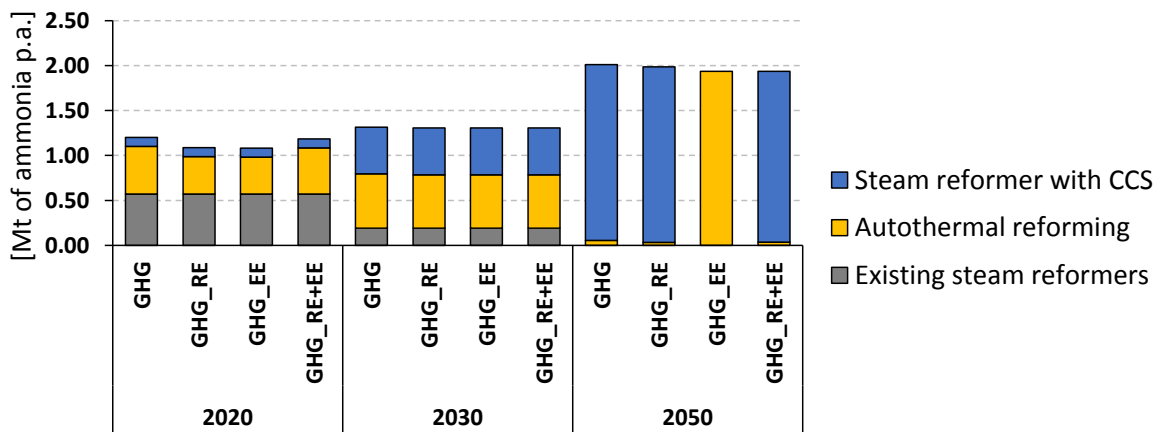

843
844

Figure A-4: Technology evolution for ammonia production in the low-carbon scenarios

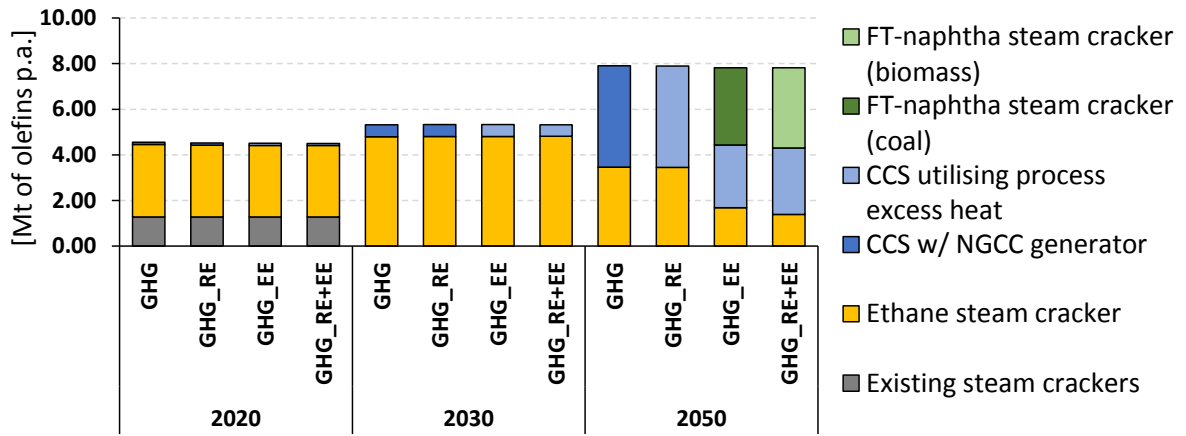

845
846
847

Figure A-5: Technology evolution for the production of high value chemicals (olefins) in the low-carbon scenarios